
Vol. XCVIII.-No. 10.


NEW YORK, MARCH 7, 1908.

10 CENTS A COPY \$3.00 A YEAR.

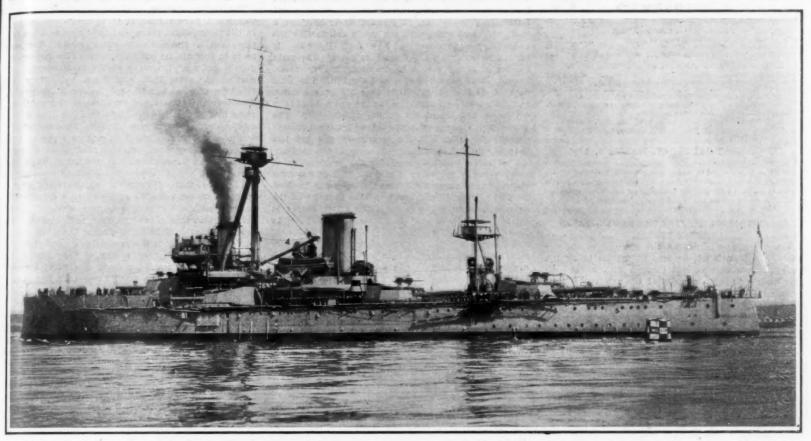

Displacement, 17,900 tons. Speed, 21 knots. Coal supply, 2,000 tons. Fuel oil, 400 tons. Armor: Belt, 11 inches; turrets, 11 inches; deck, 3% inches; side armor, 11 inches to 8 inches. Guins: Ten 45-caliber 12-inch; twenty-seven[12-pounders. Torpedo tubes, 5 submerged. Date, 1906.

All-Big-Gun Battleship "Dreadnought." Also Class of Six Similar Ships of 18,600 and 19,560 Tons.

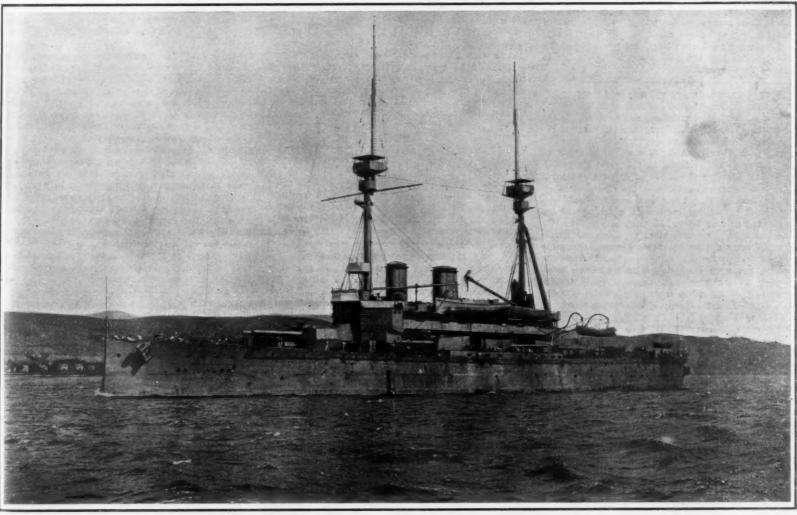

Displacement, 16,600 tons. Speed, 18.8 knots. Coal supply, 2,000 tons. Fuel oil, 400 tons. Armor: Belt, 12 inches; side armor, 7 inches; 12-inch turrets, 8 inches to 14 inches; 9.2-inch turrets, 7 inches; deek, 2 inches. Guns: Four 12-inch; fifteen 12-pounders. Torpedo tubes, 5. Date, 1906.

#### SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO.

Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

CHARLES ALLEN MUNN, President 361 Broadway, New York

FREDERICK CONVERSE BEACH, Jec'y and Treas.
361 Broadway, New York

		SUBSCRIBERS.	
One copy, one year,	for the United	States or Mexico	\$3,00
One copy, one year,	to any foreign	country, postage prepaid, 18s. 6d.	3.75 4.50

THE SCIENTIFIC AMERICAN PUBLICATIONS.
Scientific American (established 1845) \$3.00 a yes Scientific American Supplement (established 1876) 5.00 American Homes and Gardens 3.00 Scientific American Export Edition (established 1878) 3.00 Scientific American Export Edition (established 1878)

The combined subscription rates and rates to foreign countries, including Canada, will be furnished upon application.

Ecmit by postal or express money order, or by bank draft or check.

MUNN & CO., 331 Broadway, New York.

NEW YORK, SATURDAY, MARCH 7, 1908.

the Editor is always glad to receive for examination illustrated articles subjects of timely interest. If the photographs are sharp, the articles rt, and the facts authentic, the contributions will receive special attion. Accepted articles will be paid for at regular space rates.

# HEAVY TRAFFIC THROUGH THE NEWLY-OPENED HUDSON TUNNEL.

The ceremonies attending the opening of the up-town twin tunnels of the McAdoo system below the Hudson River were carried through with marked enthusiasm; and the popularity of the new route is attested by the fact that, during the first twenty-four hours, 70,000 people were carried to and fro beneath the river. The value of this route as forming a link the chain of continuous communication between New Jersey and New York city, is evidenced by the fact that already a contract between the Eric Railroad and the Hudson River Tunnel Company has been signed, and the president of the railroad has announced that connection with the new tunnels will be made within a few months' time. Although the new route will prove to be of great convenience to longdistance passengers arriving over the transcontinental lines that have their termini in Jersey City, its most marked effect will undoubtedly be felt in promoting uburban travel in New Jersey, by placing the charm ing residential towns and districts of that State with in easy and convenient touch of the business sections of New York. Moreover, the obvious advantages of having direct communication with New change of car will prove a stimulus to the railroads to electrify their suburban lines, and equip them with electric trains that can pass through the tunnels to the New York terminus.

#### DOUBLE-DOOR CARS FOR SUBWAY CONGESTION

Mr. Bion J. Arnold, the engineer who was called in by the Public Service Commission to make a study of the improvement of Subway transit facilities in York, has reported to the Commission that real solution of the problem of accelerating travel in way is to be found in the car. mends that the present cars be equipped with double doors at the ends of each car, with a view to separating the streams of entering and leaving passengers, and getting rid of the interference which lies at the of the present delay. Mr. Arnold has thus laid his hand upon the very feature to which the Scien-THIC AMERICAN for several years has pointed as the true cause of traffic congestion, not merely upon the Subway, but upon all railroad lines that are crowded. Long before the Subway was opened, indeed, we urged that the side-door car was absolutely indiscrowded. pensable, if the full capacity of the system was to be

Mr. Arnold recommends that a second door be provided at each end of the car immediately adjoining the pocket into which the present doors slide when are opened. The present doors are to be used exclusively by passengers boarding the car, and the new doors by those who are leaving it. As the matter now stands, when an express car draws up to the platform, a closely-packed crowd of passengers inside doer of the car finds itself confronted by another densely-packed crowd of passengers outside the door. the new system, the two crowds will be separated; and the instant the doors are opened, the one will find unobstructed entrance into the car, and the other unobstructed exit from it. The time for loading and unloading, as far as the movement of passengers is concerned, will thus be cut in half. Moreover, he suggests that the present method of opening the doors by hand, and of signaling by bell cord, be replaced by the use of pneumatic means for ning and closing doors, with automatic "go-aher indicators to the motormen, which will operate the

moment the last door is closed. By these changes Mr. Arnold estimates that the time taken for unloading and loading trains at stations will be reduced from 55 seconds to 30 seconds, and that the capacity for trains through a given station can be raised from less than thirty to forty per hour.

URGENT NEED FOR THE CATSKILL WATER SUPPLY

The new system for the supply of pure mountain water to New York city is the most extensive project of its kind ever undertaken. The Catskill water is noted for its purity and abundance; and when New York decided to go back into the mountains, and drive tunnels and build dams and dikes for collecting and impounding the water, it planned everything on a most ambitious scale, with a view to anticipating the exceedingly rapid growth of New York city which is The main certain to occur with the years to come. sources of supply are to be drawn from four creeks Esopus, Rondout, Schoharie, and Catskill. The total area of all the watersheds is over 900 square miles, and their combined supply, when they have been fully developed, will exceed 800 million gallons daily. works which are now projected will have sufficient capacity to bring into the city every day not less than 500 million gallons.

That there is urgent need for the construction these works is proved by a consideration of the facts regarding the present consumption of water by New York city, and the maximum present capacity of the aqueducts through which the city's water supply is brought in. At present the Croton water flows to New York through two conduits, known as the "Old" and the "New Aqueduct," whose combined maximum capacity is 380 million gallons per day. Now, during onth of last year, the city used an average 345 million gallons per day, all of which was drawn aqueducts from the Croton watersho The rate of increase of consumption of water by the for seven years past has been 15 million gallons per day each year; so that at this rate of increase the will soon be calling for more water than the existing aqueducts can carry. Furthermore, the safe average yield of the Croton watershed per day in a series of dry years is only 336 million gallons per day

What the city's future demand for water will be is shown from the following figures. To-day the population of Greater New York is about 4,350,000. The total consumption of water is 500 million gallons per day, of which the Croton system, when completely developed in 1910, can furnish according to the figures of the Board of Water Supply only 336 million gallons. At the end of 1915, it is estimated that the population of Greater New York will be 5,260,000, and its water consumption 710 million gallons per day, or 250 millions above the present available supply. It is estimated that by the year 1930 the population will have increased to almost 7,000,000, and the consumption to over 1,000 million gallons daily.

It should be a source of the liveliest satisfaction to the people of this city that in the present serious emergency, the task of providing a new supply of water is in the hands of a Board who have succeeded in organizing their working forces without the least interference from politicians. It is the boast of the chief engineer, Mr. Waldo Smith, that he has been able to select his large staff of engineers purely on their merits. Moreover, the recent attempt to exercise political control in the matter of the letting of the \$12,000,000 contract for the Olive Bridge dam, proved to be an ignominious failure, the higher courts deciding that the action of the Board in rejecting the lower bid, on the ground that its engineers pronounced it impracticable, was entirely justified.

#### THE ALLEGED PATENT OFFICE FRAUDS.

For the first time in its honorable history of over a century, an official of the United States Patent Office is charged with a crime so serious in its nature. that every manufacturer, every inventor, and every patent lawyer will find it hard to give it credence Upon information furnished by the Commissioner of Patents, a grand jury has indicted Ned W. Barton, Third Assistant Examiner of the United States Patent Henry E. Everding, a patent attorney; John Allen Heany, an inventor, for having entered into a conspiracy to appropriate the discoveries of inventors, and in furtherance of this end with having destroyed and faisified Patent Office records. Patent Office examiner in question is an able man, who enjoyed the respect and confidence of his colleagues; the patent attorney occupies an enviable position as a patent expert of ability; the inventor involved has made a name for himself as an investigator of exceptional ingenuity, if not genius, whose dogged pertinacity enabled him to perfect inventions which promise radically to improve our methods of lighting. The indictment alleges that on January 19, 1905, Heany made an application for Letters Patent covering an invention for a tungsten incandescent eleclamp. It is charged that an official letter addressed by the Commissioner of Patents to the inventor on March 28, 1905, and an amendment filed July 27, 1905, by the attorney, were destroyed, and that Barton, conspiring with Everding and deany substituted for the original application of Heady new papers, in which were incorporated the ideas of inventors who had also filed applications for latents which covered inventions in the same field, and which necessarily came before Barton to pass upon, so that Heany's application, bearing as it did the original date of filing, falsified, naturally took priorit. In order to carry out such a scheme, it was necessarily to destroy original records, to file substitutes, and to change the dates of receiving stamps.

The carbon filament lamp remains to-day w at it was when Edison brought it to perfection in 1879 In the twenty-eight years that have elapsed since time, not a single notable improvement has made to increase its efficiency, which circumstance indicates not that inventive ability is lacking of great lamp companies, but simply that this type of lamp has reached the end of its possible development. It was not astonishing, therefore that some attempts should be made to devise lamps totally different character. It was known that sev. eral elements are infusible enough to serve as filaments if they can only be made in that form Among them tungsten seemed promising. perature at which carbon volatilizes is considerably ower than that of tungsten, which means that a tungsten filament can be subjected to a considerably higher temperature than a carbon filament. this circumstance alone we may conclude that tungsten lamp will be more efficient than the carbon, The chief difficulty is the production of pure tungsten filaments. The very infusibility of the metal is the chief obstacle to its being made into wire; for such metals are generally obtainable only in a fine powder reduction from their oxides, or in partially lumps which contain carbon and are not in a condition suitable for wire drawing. Mr. Heany attacked the problem twelve years ago. That he was successful may be gleaned from the fact that for five years he been manufacturing tungsten lamps on a cial scale, and that the best metallic lamps now on the market are of his invention. The problem was also attacked in recent years by Dr. Alexander Just and Franz Hanaman, by Dr. H. Kuzel, and by Welsbach Company. With all of these men Mr. Heany naturally came into a legal conflict of international character and importance. Their respective claims to priority have not as yet been finally adjudicated. The victor in the struggle will have practically monopoly of the metallic-filament industry.

The patent with the falsification of which Barton, Everding, and Heany are charged is not basic, covering as it does merely the use of very fine filaments of tungsten mounted in an electric lamp in such a manner that they can be used practically and perfectly as an ordinary carbon filament is used. If the charges are sustained, no doubt Mr. Heany's more vital patents may be made the subject of investigation.

The very rigid system of recording cases as they are received in the Patent Office, the searching nature of the inquiry which is conducted in every interference case, renders any attempt such as this is alleged to be almost foolishly reckless on the part of the examiner. He must inevitably be detected. The incident, astonishing as it is, should occasion no alarm. In the present case, common sense and fairness demand that judgment be suspended until a jury has declared the men at the bar innocent or guilty. The Patent Office needs no defense. It has been the one governmental bureau that has been conducted with ability and without a trace of corruption. Commissioner Moore has put it: "No examiner has ever been shown false hitherto to the trust imposed upon him in all the one hundred and eighteen years of existence of the United States patent system."

Some interesting experiments concerning the possi bility of dispatching mes sages by kites have bee ried out at Brighton, England, by Mr. S. H. R. Salmon a meteorological scientist. He designed a special kite of the diamond-box type, fitted with a keel to insure additional stability and provided with a line 400 in length carrying a drag 30 feet long and weighing 12 pounds. A wooden bottle was attached to the kite containing a message requesting the finder of the bo tle to return it to him with full information as to the point where picked up, etc. This was sent into the air from the beach at Brighton in a wind favorably blow ing toward the coast of France, but the kite was neve heard of again. A second kite was then built, vary ing in design, being of the rhombold box type, carrying a shorter length of line and a lighter and longe drag, the measurements being respectively 200 feet 6 pounds, and 66 feet. This was launched in the same way as before, and in less than twelve hours was ed up at Vierville near Calvados in France, after traveling 103 miles. A third experiment was equally successful, the kite fouling a fishing boat  $1\frac{1}{2}$  miles on Berck, a distance of 75 miles from Brighton

1908.

file

, and

nev

ten

tha

gina

nd to

1879

bee

the

sible

that

of a

sev-

amp

orm

rably

ably

the

bon,

sten

the

such

vder

tion

the

sful

he

ner-

on

the

any

aims

rton.

ents

the

on.

ture

ged

in-

The

ner

ii

In

#### Scientific American

#### THE HEAVENS IN MARCH.

BY HENRY NORRIS BUSSELL, PH.D.

Our map shows clearly the principal constellations. The finest group is in the southwestern sky, in and near the Milky Way. Argo, the southernmost of these, is seen only in southern latitudes, but Canis Major above it is one of the ornaments of the sky, and Orion is even more so, though it contains no one star equal to Sirius. Above these groups are Canis Minor and Gemini, the last almost overhead, while Auriga is northwest of the zenith and Taurus west of it, lower down.

These constellations contain seven stars of the first magnitude (marked by the largest circles on the map) which is one-third of the whole number of such bright stars in all the heavens.

Aries is setting, a little north of west. Venus and Mars, which both pass through this constellation during the month, are much brighter than any of its stars. To the right of Aries is Andromeda, and above this is Perseus, whose most remarkable star is the variable Algol (shown on the map). This star loses about three-quarters of its light at regular intervals of 2 days 20 hours and 49 minutes, and it is known that the obscuration, which lasts about eight hours altogether, is due to its eclipse by a dark com-

panion, which revolves about it very near it. Eclipses of this sort, visible in the eastern United States, take place at 7 P. M. on March 2 (Eastern standard time), at 9 P. M. on the 22d, and 6 P. M. on the 25th. The times of the other minima (which are unobservable here) can be found by adding multiples of the period.

Of the northern constellations, Cepheus and Cassiopeia are below the pole on the left, and Draco and Ursa Minor on the right, while Ursa Major is high up in the northeastern sky. He is high up in the east, below Jupiter, which is in Cancer, and very high

Virgo and Boötes are just rising, and in the southeast Hydra has dragged about half its enormous length into sight.

THE PLANETS

Mercury is morning star all through the month, but is not well visible until its end. On the 27th he reaches his greatest elongation, nearly 28 deg. from the sun. At this time, however, he is a good way south of the sun, and consequently he rises only about an hour before him.

Venus is evening star, and is now exceedingly conspicuous, setting at about 8:45 P. M., in the middle of the month. She is growing brighter as she approaches us, and is

visible in broad daylight if one knows just where to look for her. On the afternoon of the 5th she is about 6 deg. north and 3 deg. west of the moon, which may help in picking her up. (The diameter of the moon measures about half a degree.)

Mars is also evening star, and is moving slowly eastward through Aries into Taurus. Venus is overtaking him, but she does not catch up with him till early next month.

Jupiter is in Cancer, visible almost all night, and finely placed for observation.

For the sake of those who have telescopes, we my remark that eclipses of his satellites occur as follows

The 1st satellite disappears behind the planet on the 18th at 10 P. M. and comes out of eclipse on the other side at 1:30 A. M. The later eclipses follow regularly at intervals of 1 day 18½ hours. The similar data for the other satellites are:

Eclipse of the 2d, March 2, noon to 4 P. M. Eclipse of the 3d, March 1, 7 P. M. to 2 A. M. Eclipse of the 4th, March 1, 6 P. M. to 11 P. M. and thereafter at intervals of 3 days 131/4 hours,

Eclipse of the 4th, March 1, 6 P. M. to 11 P. M. and thereafter at intervals of 3 days 13½ hours, 7 days 4 hours, and 16 days 18 hours, respectively. Half way between every two eclipses the satellites and their shadows travel across the planet's disk. The evening of the 26th is especially notable as the 1st

satellite is eclipsed, while the 3d and 4th and their shadows transit over the disk.

Saturn is in conjunction with the sun on the 20th, and is practically invisible this month. Uranus is morning star in Sagittarius, too low to be well seen. Neptune is in Gemini, and comes to the meridian about 7:20 P. M. on the 15th.

THE MOON.

New moon occurs at 2 P. M. on March 2, first quarter at 5 P. M. on the 9th, full moon at 9 P. M. on the 17th, and last quarter at 7 A. M. on the 25th. The moon is nearest us on the 1st and the 29th, and most remote on the 13th. She is in conjunction with Mercury on the 2d, Saturn on the 3d, Venus on the 5th, Mars on the 6th, Neptune on the 18th, Jupiter on the 13th, Uranus on the 26th, Mercury again on the 29th, and Saturn on the 31st.

Princeton University Observatory,

#### SAND BUILDING-BRICKS.

The increasing use of building-bricks or blocks made of sand and cement in Europe has given rise to a number of questions as regards the various qualities of this building material; and at first the manufacturers (usually on a small scale and working independently of each other) were not able to answer such questions.

dice in the minds of those who have to carry them; it is only a question of the weight on the foundations.

It is a well-known fact that good "klinkers" absorb only a very small amount of water, as their surface is not only smooth but practically coated with a glaze. For this reason they must be laid in cement mortar. But the sand blocks with a crushing strength, called for by the municipal building authorities, of 2,000 pounds per square inch, are porous enough to be laid in ordinary lime mortar, even when it is permitted by the building inspectors to use them instead of "klinkers."

The matter of bad smell has often been laid at the door of the new building material. This, however, should be only when they are just from the works, or when they are laid up just after being wetted by the rain. As, however, the crust gets harder and harder with time, the odor is not perceptible when it is time to paper the rooms.

One advantage of the sand blocks is that as they are always rectangular, and have smooth faces and sharp edges and corners, there are not so many "wasters" as is the case with bricks, where there are often many that are badly burned or only half burned. This enables more rapid work, outside of the question of saving in the material itself. The sand blocks

break less in handling and laying than the burned clay bricks; they are also of more regular quality. Further, there is no difficulty in making radial, half, and quarter blocks, so that they are convenient for architects who wish to have special ideas carried out.

The sand blocks are free from saltpeter—a freedom which is not shared by most clay bricks. They have the great advantage that they call for no plastering in cellars, workshops, and workrooms, or even in corridors, this effecting a great saving in construction.

Further, the blocks may be used in work where color schemes are carried out,

As regards fireproof qualities, reference may be made to the burning of the Virksche sand-block works in Malchow, Mecklenburg. From the report concerning this fire the following is taken;


"The two stacks, which remain standing, and one of which was made of the best clay bricks, and the other of sand blocks, present the most remarkable appearance. The latter is entirely unchanged in its external appearance; the blocks remain smooth and sharp-cornered, although they were subjected to a heat so intense that the lightning-rod was melted. The stack built of clay bricks did not experience

such intense heat, as is shown by the unchanged condition of the lightning rod; but for all that, it showed considerable damage. A cross of white hard brick built into this stack was uninjured, while the ordinary brick surrounding it was notably injured."

Tests of the fireproof quality of the new material have been made by the building authorities in Hamburg, Rostock, Colperg, etc.; but the most important were those in Berlin. The report concerning them states that "good lime and sand blocks are equal, in resistance to fire and to water-jets, to the ordinary burned bricks."

A further advantage claimed for this material is that it permits perfect bond between the mortar and itself.

Drill bits that are to be used in sandstone should be tapered somewhat and then flattened instead of drawn to a cutting edge. When a chisel bit is used for drilling sandstone the bit is apt to wear sharp. Rock drill bits for use in medium hard rock should have sharp chisel bits, so that if the hardness of the rock increases, the angle of the bit will become more blunt and the cutting edge become shaped to a curve instead of a straight line, which will prevent the chipping off of the corners.—Engineering.

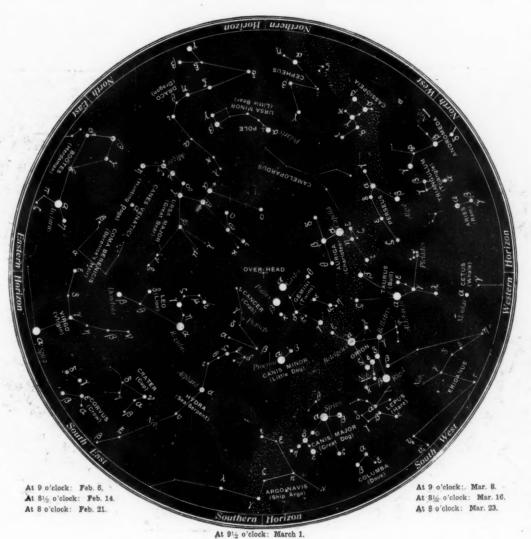

NICHT SKY: FEBRUARY AND MARCH

At present, however, they are in possession of more and more data, going to show what the material can and what it cannot do.

As regards resistance to frost, Herr Carl Dickow, of Trebitsch, writes that he had a boatload of these blocks which were exposed during the winter to the very severest frost; some of them being partly under water. In the spring, when the snow was gone, the blocks withstood the alternate freezing and thawing action very well.

As regards their weight and lack of porosity, it nould be borne in mind that like should be compared with like. It is not fair to compare the weight of sand blocks, standing 3,290 pounds pressure per square inch, with soft inside clay bricks standing only 1,280 pounds, and then complain that the sand blocks weigh a few ounces more than the others. A sand block standing 3,200 pounds pressure should be compared with the so-called "klinkers" or hard-burned brick (for which only 2,000 pounds crushing strength is required). But "klinkers" weigh 10½ pounds against the 7½ to 8 pounds of the sand blocks. And as in any case bricks, as well as other building blocks, are nowadays brought to the place where they are laid by elevators instead of on laborers' shoulders or backs, the question of weight should raise no preju-

#### EXPERIMENTS WITH RECENT FRENCH AEROPLANES.


The photographs which we reproduce herewith show the Gastambide-Mangin aeroplane in flight and its appearance after the accident which happened during its first test, as well as the constructural details of the new Farman and Bleriot aeroplanes.

The first-mentioned aeroplane was fully described in the Scientific American of January 18. During the first experiments which were made with it at Bagatelle on February 14, this machine, mounted by M. Boyen, succeeded in making a short flight of about 150 feet. This first flight was so successful that the aviator thought he could do even better. In the sequent trial, after the machine had run along on the ground for 250 to 300 feet, it rose in the air and covered a distance of nearly 500 feet, though swaying all the while to the right or to the left and varying in its height above the ground continually. The flight was suddenly terminated by a dive sideways, as the result of which the bow and the propeller dug forcibly Into the ground, the machine turned a somersault, and came to rest upside down. The resulting damage is apparent from the photographs. The aviator ceived no serious injury and was able to crawl out of the wreck unaided.

This wrecking of the Gastambide-Mangin aeroplane upon its first test is only a repetition of what has occurred to almost all the other monoplanes that have been built and experimented with abroad, and it would seem to show that this type of machine is extremely dangerous and unstable, even though the constructors make use of the dihedral angle for the purpose of

enhancing its transverse stability. The machine had no horizontal rudder or no balancing tail of any size, and it may have been due to this fact that it made a sudden dive. In their effort to obtain simplicity the constructors evidently failed to provide proper means





Side and Plan Diagrams of New Farman Aeroplane.

The front planes are not in superposed pairs as shown in upper diagram but are single like those in the rear. The rearmost plane is pivoted to act as a horizontal rudder.

for controlling the longitudinal stability. Even M. Bleriot, who experimented successfully last summer with a Langley type, single-surface, following-plane machine, had several bad falls with his first machines, while, when he changed to a monoplane, this machine was demolished on December 18 last by a fall caused,


however, by the breaking of the wings while in flight.
M. Esnault-Pelterie and Count de la Vaulx also suffered bad falls with their monoplane machines; so that this type is now in little favor and is generally thought to be extremely dangerous.

On the other hand, M. Henry Farman made 250 or more flights and landings with his double-surface following-plane machine, without sustaining serious damage in any of the landings. M. Farman, however, has decided to try a new type of machine which he has designed, and a general idea of which can be seen from the diagrams, while the photograph of the body framework shows the length and delicate ap-pearance of this structure. This framework is 14 meters (45.93 feet) long over all including the vertical rudder. Attached to it on each side at the front are three planes arranged in steps. The total spread of the forward planes is 6.25 meters (20.51 feet), while that of the rear planes is 4.7 meters (15.42 feet). The total supporting surface is about 24 square meters (2581/3 square feet), which corresponds to a loading of the surfaces of 5½ pounds per square foot, if we consider the weight of the machine as 650 kilos (1,433 pounds)-a figure which it will probably exceed. glance at the photograph will show the comparatively small size of one of the supporting planes, as a frame of one of these planes is seen standing beside the body framework. M. Farman proposes to equip his body framework. M. Farman proposes to equip his new machine with either a 50-horse-power Renault, 8-cylinder, air-cooled motor, or with an 8-cylinder, 80horse-power, Antoinette motor. The speed at which the machine should rise is calculated to be 80 kilo-




Gastambide-Mangin Aeroplane Before Its Accident.

Spread of wings, 32.8 feet; supporting surface, 258 square feet; weight, 880 pounds; propeller, 0½ feet diameter x 4½ feet pitch; engine, 50 H. P., 8-cylinder V motor.

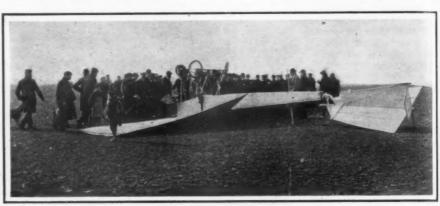


The Aeroplane Upside Down After the Accident.

The relatively small size of the tail, which was broken off in the accident, is noticeable in the above illustration.

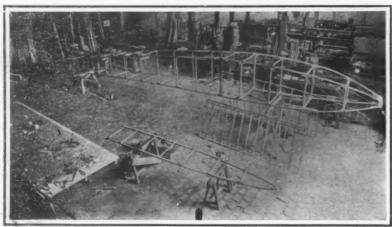

The Body Framework of the New Farman Aeroplane.

The small size of the planes can be seen from the frame of one of these which stands beside the forward saw horse. Length of body about 45 feet.

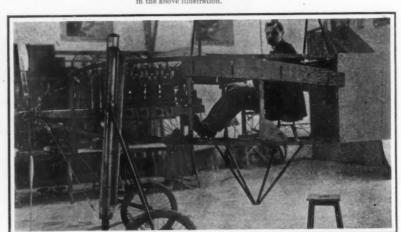


Front End of Body of the New Bleriot Aeroplane.

This photograph shows the spiral-spring mounting of the front wheels and the plate for attaching one of the planes to the body.



The G-M Monoplane in Flight.

The photograph shows the machine tipping to one side before it crashed to the ground.

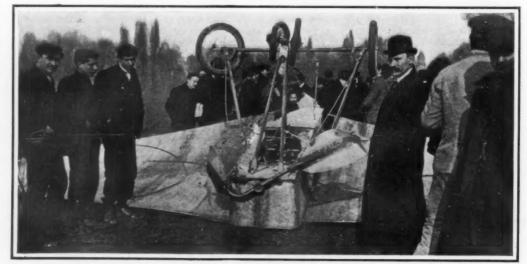

Front View of the Demolished Aeroplane, Showing Damaged Propeller.

The wings are built up on strong wood and aluminium girders and numerous parallel steel strips running in a fore-and-aft direction.

Owing to this strong construction, they were not badly damaged.

TRIALS OF THE LATEST FRENCH MONOPLANE AND CONSTRUCTIONAL DETAILS OF THE NEW FARMAN AND BLERIOT MACHINES.

1908.

lso suf.

enerally

ace fol.

us dam.

owever,

which can be

e front

spread

while The

meters oåding

if we

frame le the ip his nault, er, 80which

ed. A

of the apis 14

nes;

meters, or 50 miles, an hour. While M. Farman may succeed in flying with this machine, one can readily see that it will be a difficult matter to attain the requisite speed for soaring, and that when he is once in the air, the machine will probably lack stability. Should it upset at any such speed, the aviator runs a

the machine have been carefully withheld, the authorities in order to secure secrecy having established the constructional camp in the midst of the wild mountains of Scotland, whither the component parts of the apparatus, after completion at the balloon factory at Aldershot, are being conveyed for assembling.

PROGRESS OF THE CATSKILL WATER SUPPLY.

Progress on the Catskill water supply, the greatest municipal undertaking of its kind in the world, has now reached a point where it is possible to give some photographic representation of the work being done; and it will be seen from the accompanying views that ground has not only been broken, but that the work of moving the material is, at some points of the line, in full swing. As a matter of fact, about \$20,000,000 worth of work is under contract, in which is included about 11 miles of aqueduct and the great Olive Bridge dam and dikes which are to form the Ashokan reservoir. About sixty million dollars' worth of work is also surveyed and in shape for contracts.

The principal feature of the system, which is designed to bring 500 million gallons of Croton water to New York daily, is the creation, by the construction of the Olive Bridge dam, of a huge artificial basin, which will be known as the Ashokan reservoir, and will impound 130 billion gallons of water. The dam, of which we show several views, will be built partly of soild masonry and partly of earth. The masonry portion of the dam will occupy the center of its length, and will extend for about 1,000 feet. It will be of the



Mixing Concrete for Culvert Under the Aqueduct. Trench for Aqueduct is Seen in the Background.


far greater chance of serious injury than with those aeroplanes that have already met with disaster while traveling at a speed of about 30 miles an hour.

M. Louis Bleriot, whose aeroplane experiments last summer with a Langley-type machine were fully described and illustrated in Supplement No. 1654, has, since the demolishment of his No. 6 machine, undertaken the construction of two new aeroplanes, and these are now about completed. One of our illustrations shows the front end of the body framework, which in both these new aeroplanes will be twice as long as that of the No. 6, i. e., 14 meters (45.93 feet). The photograph shows the method of attaching the planes and of mounting the motor. The engine shown is an 8-cylinder Antoinette motor of 50 horse-power; but Bleriot expects to try a 16-cylinder motor of the same type and horse-power in the other machine. The body framework is rectangular in cross-section at the front end, as shown, but the rear portion is to be made triangular in shape, similarly to the body of the Antoinette aeroplane of Levavasseur and Capt, Ferber, M. Henry Kapférer, another enthusiastic aviator, has recently completed at Montesson a new Langley-type aeroplane, with which he expects to experiment shortly at Issy-les-Moulineaux.

#### Aeroplane Developments in Great Britain.

BY-OUR LONDON CORRESPONDENT.

During the past year but little investigation in mechanical flight has been effected in Great Britain. For some months past, however, the government has been interested in the construction of a heavier-than-air machine which has been designed by Mr. W. S. Dunn, the experiments with which will be carried out within the next few weeks. Details concerning

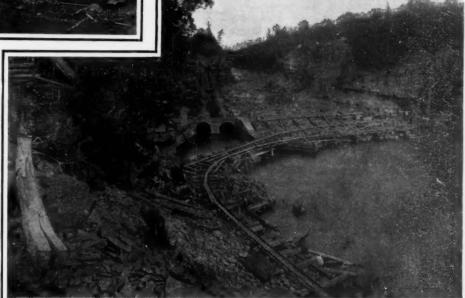

Site of Olive Bridge Dam, Which will be 220 Feet High and 5,650 Feet Long. The Two 8-Foot Pipes Are for By-passing the Esopus Creek During Construction.  $\epsilon$ 

The machine is, however, fundamentally based upon the gliding apparatus evolved by José Weiss, but several radical modifications have been introduced. Aluminium tube enters very extensively into its construction, to insure economy in weight while securing an adequate factor of strength, and the planes are covered with a strong thick black silk. Instead of having only two wings, as was the case in the Weiss machine, the present aeroplane has four planes, each about 50 feet in length, disposed in pairs one above the other on either side. The framework is tightly (Continued on page 166.)

general cross section shown in the accompanying engravings. From foundation to crest it will rise 220 feet in height. The earth-and-core-wall portions of the dam, which will extend from the masonry section to a junction with the sides of the valley, will have a total length of 5,650 feet, making the crest of the dam over one mile in length. In addition to the dam, there will be a series of dikes, which will be built across depressions in the country, where they will be necessary to hold the water up to the desired level. These dikes alone will be on a vast scale, and together with the waste weir will have a total length of 3.8 miles.



Excavation of Trench Preparatory to Building the 17%-Foot Concrete Aqueduct. The Aqueduct Will be Constructed Upon a Carefully-Leveled Foundation and Covered in with Earth Rolled Down in Layers.



Hudson River at Storm King Mountain, Showing Scows From Which Borings Are Being Made for the Aqueduct Syphon by Which the Water Will Pass Below the River.

The contract for the Olive Bridge dam and reservoir has been let for \$12,000,000, and, as will be seen from the accompanying engravings, the preliminary works at the site of the dam are well under way. As it will be necessary to excavate at the site of the dam down to solid rock, provision has to be made for by-passing the waters of Esopus Creek, and for the present this is being done by means of two 8-foot steel pipes, which are sufficient to take care of the usual flow of the Freshets will, of course, flood the works; but before the excavation is carried down to any considerable depth, the waters of the creek will be taken care of by the construction of a channel along the side of the valley. Ultimately, the water will be allowed to flow through a tunnel formed in the masonry of the dam, which will be closed when the dam is completed. The Ashokan reservoir will constitute a lake of considerable magnitude; for it will be 2 miles in width and 12 miles in total length. Besides impounding the waters of the Esopus, the reservoir will receive those diverted from Schoharie Creek by neans of a 10-mile tunnel through the mountains, and from Catskill Creek and adjacent small watersheds ugh another aqueduct.

From Ashokan reservoir the water will flow by gravity through a concrete aqueduct 17 feet high and 17 feet 6 inches wide to a storage reservoir at Kensico, having a capacity of 40 billion gallons. From Kensico it will flow to a large filtration plant at Scarsdale; whence it will flow to a reservoir at Hilliew, Yonkers. The Hillview reser-

voir will be at sufficient elevation to enable the water to flow by gravity for distribution throughout Greater New York.

In those portions of the aqueduct where the water flows at hydraulic grade. the aqueduct will be built of concrete; but wherever it must cross those deep glacial gorges of which the small chan of such streams as Rondout Creek are only a slight surface indication, tunnels will be driven in solid rock far below the surface of the ground, and lined with con-At each end of such tunnels will be a vertical shaft, thus form ing a huge inverted siphon. such works the most perplexing and costly will be the crossing of the Hudson River at Storm King, where the river is 2,800 feet wide Although the depth of the river at this point is only 90 feet, the borwhich have been carried down 617 feet, have not yet encountered solid rock. As the aqueduct ap-proaches the river at an elevation of 400 feet above its surface, it follows that the inverted siphon must reach a depth of at least 1,000 fee and Heaven only knows how much deeper than that. One of our illustrations is taken from the easterly shore of the Hudson River looking toward Storm King Mountain, which is seen in the background. The four scows anchored across the river are engaged in boring opera

tions. Of the four borings, one had been driven to a depth of 617 feet when it was lost by the collision of a disabled steamer, which ran down and carried away the scow.


The construction of the masonry portion of the Olive Bridge dam will include some novel features which do not appear in the recently completed Croton One of these is the provision of vertical drainage pipes built into the masonry of the dam for intercepting any seepage water that may enter the up-stream side. All masonry dams are liable to this seepage, which, passing through the masonry and issuing from the downstream face, produces a and white discoloration, which not only is unsightly in appearance, but also gives the impression that the dam is not tight. This seepage will occur in the best constructed dams, and does not in any way indicate poor construction. The location of these vertical drainage pipes is shown in the cross section of the dam, Fig. 1. They terminate at top and bottom in ction galleries

Another interesting feature of the dam is the provision, at intervals of every 84 feet of its length, of vertical expansion and contraction joints. These extend from crest to foundation, and are intended to localize the expansion due to changes of temperature, and prevent the occurrence of those unsightly cracks which occur when large masonry masses such as this are cooling down to normal temperature. It will surprise some of our readers to learn that when cement is setting, the temperature of the interior of a large mass of masonry, such as this, will rise to as high

From this temperature the mass as 130 degrees. gradually cools to a normal internal temperature in this climate of say about 50 degrees; and, of course, there is a corresponding contraction of the mass when this takes place. If the dam is built absolutely monolithic, the expansion will produce fine hair cracks at one or more points, and these will not necessarily follow the joints in the masonry, the huge masses of stones themselves being torn asunder during the shrinkage. By providing vertical expansion joints, the strength of the masonry to withstand horizontal thrust of the water is not impaired, and at the same time the total movement due to changes of temperature is divided among a large number becomes inappreciable at each. The joints are formed by molding concrete blocks with a smooth stepped face, the stepping, of course, running across dam, transversely to its axis, as shown in Fig. 3. joint will be washed with some suitable kind of preparation, which will admit of easy separation while at the same time being watertight. ----

#### The Largest Proposed French Airship.

The French War Department is actively pushing the construction of the new dirigible "La République," and is expecting to have this new aerial warship ready next May. The 1908 budget includes the construction of two dirigibles of like size, and when these are completed the government will undertake to build several larger airships of nearly twice the size. The plans

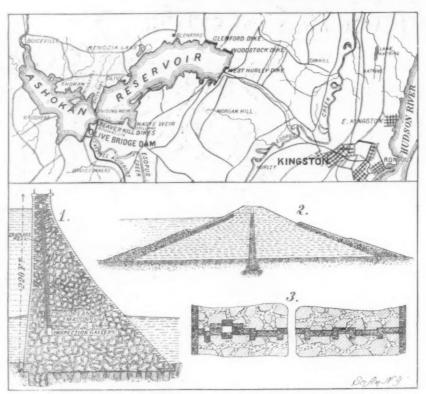

 Cross-section of masonry portion of dam. 2. Cross-section of earth-and-corewall dam. 3. Horizontal section through an expansion joint in dam.

# Plan and Details of the Ashokan Reservoir and Dam. PROGRESS OF THE CATSKILL WATER SUPPLY.

for the first of these have been drawn up recently by the Lebaudy brothers, and submitted to the War Department. The length of these new airships will be 100 meters (328 feet); the greatest diameter, 11½ meters (37¾ feet), and the capacity between 7,000 and 8,000 cubic meters (247,198 and 282,512 cubic feet). The horse-power will be 240, and will consist of two 120 horse-power, four-cylinder Panhard engines driving two separate propeller shafts extending the entire length of the body and carrying a propeller at each end. Thus, there will be four propellers, two (one at the front and one at the rear) being operated by each motor. In case of a breakdown of either of the engines, the other is sufficiently powerful to drive the airship to its destination.

There are also to be two lifting propellers mounted on vertical shafts for the purpose of obtaining stability under the most adverse conditions. The euvelope will be constructed of waterproof fabric supported upon a rigid frame in a similar manner to that of the Zeppelin airship, while the ballonette to allow for expansion and contraction will also be retained.

pansion and contraction will also be retained.

Following out the plan of the Italians Crocco and Ricaldoni to use their hydroplane gliding boat with aerial propellers as the body part of a new Italian dirigible which is being constructed, it is proposed to use the motor boat "Panhard-Tellier," which has its engines already installed, as the body part of the new French dirigible. It is expected to obtain a speed of 60 kilometers (37.28 miles) an hour. The lifting power of the new airship will be in the neighborhood of eight tons.

#### Aeroplane Developments in Great Britain. (Continued from page 165.)

braced with piano wire to secure rigidity. The motive power will consist of two French gasoline motors, in which it has been possible to reduce the weight to approximately 1.5 pounds per horse-power. These engines drive two propellers in opposite directions, In this instance the twin-engine system has been adopted, the power being transmitted through suitable gearing to secure the requisite peripheral speed for the propellers.

The aeroplane is to be mounted upon a lightly-built, four-wheeled bicycle carriage constructed of aluminium, which is driven along the ground in order in secure the necessary impetus to enable the aeroplane to ascend. The greatest difficulty has been experienced in connection with this part of the apparatus. It is essential that it should form part and parcel of the machine, so as to enable it to ascend wherever and whenever desired, but at the same time its presence rather militates against the utility of the apparatus, since in descent it has been found that there is always the liability of the impact with the ground being so severe as to render the bicycle carriage useless for its purpose, thereby preventing an immediately succeeding ascent.

Another smaller aeroplane, or rather motor-propelled kite, is being constructed at Aldershot. This comprises a large model of the successful Cody man-lifting kites, which are now extensively adopted for recon-

noitering purposes instead of 'the more cumbersome captive balloon, an engine being incorporated in order to impart the necessary "lift" in lieu of the pilot kites. The mechanical equipment installed sufficiently powerful to force the kite into the air with a man at tached. The trials that have been carried out in the constructional building have been completely suc cessful, but no efforts to test the system to ascertain its efficiency under ordinary atmospheric conditions have yet been made, the energies of the establishment being present concentrated upon the completion of the second dirigible balloon, that is to be tested during the next few weeks.

The trials are also to be carried out shortly upon the Brooklands automobile track with the new Moore-Brabazon aeroplane. This machine in its design is a combination of the Farman and Chanute systems.

There are the two superposed plane surfaces, or wings, together with the smaller front plane to control inclination and declination in the air. Instead of the cellular tail adopted by Farman, and which the latter inventor hopes to abandon entirely, as it acts as a serious drag upon the machine, there is a special contrivance that has been evolved by the builder to insure right and left horizontal steering. A Buchet motor of 25

horse-power drives a propeller of the usual type.

#### Testing Locomotives.

A new locomotive engine undergoes a thorough test before it is sent out on the road to take its share of work. When a new engine is taken into a shop it is turned over to a mechanic whose duty it is to fit it up and make all connections and adjustments of the interior mechanism. This completed, the engine is turned over to a fireman, who steams it up and blows it off in order to remove any grease that may have accumulated in the boiler, or such foreign substances as might cause a boiler to "foam" while in service. The engine is then turned over to an engineer, whose duty it is to "break" it in. The engine is steamed up again, and if it will run is taken for a little tryout about the yard.

If all goes well and there is no heating in the journals or brasses, the engine is worked for a few hours, and then the steam is again blown off. It is next sent out on a long-distance trip, at a speed varying from one to twenty miles an hour, and drawing about half its full load.

Heating is one of the principal diseases of an engine, and it is this feature the engineer looks to more than anything else. The mechanical sense of the experienced engineer is so developed that he can detect the least defect about his engine.

The Austrian state railroads recently made contracts for 1,754,000 sleepers. Of these 28.9 per cent are to be oak, 26.5 larch, 42.4 fir, and 1.8 beech.

008.

These

bein

ed for

alumi.

plane

ratu

rev

oun 1

nedi-

elled

com

fting

lift"

m.

een

nev

ing

ite

ler

#### Scientific American

#### Correspondence.

Trap-Door Spiders' Nests.

the Editor of the Scientific American:

To me Mr. Hutchinson's article on tarantulas was resting. Confined to a valley by an injury, I made creation of locating trap-door spiders' nests. I found three nests to the square foot, but only onc: they are often many yards from their nearest neighbor. The entrance is usually on a slope of about 45 degrees, from  $\frac{1}{2}$  inch to  $\frac{2}{3}$  inch in diameter, and is down 3 to 4 inches; then it inclines upward and down again, where it expands to 2 or 3 inches in diameter. The walls are covered with three thicknes es of web resembling tissue paper. The doors are of many thicknesses, with hinge on the upper side.

If the nest has been in existence but a short time,

 $_{\rm mo^{-3},\ grass,\ or\ whatever\ happens\ to\ be\ growing\ near,}$   $_{\rm will}$  be found eking out an existence in the soil placed in the concave lid, making the searcher look very diligently. A door can be built and covered with earth one night, but the fit is not so good as when done less hurriedly.

stick 1/2 inch in diameter, 7 inches in length placed in the open door was removed in a night, as were also two pebbles and a rough piece of clay, weighing from one to two ounces, which were placed to support the stick. I never found more than one adult in a nest, although I have found several half grown and once an adult with scores of young the size JOSEPH HAZELL. of bird shot.

N. San Diego, Cal., January 28, 1908.

#### Tideman and the Experimental Model Basin.

To the Editor of the SCIENTIFIC AMERICAN:

I read with great interest the "Simple Explanation of Model Basin Methods," by D. W. Taylor, naval constructor, U. S. N., published in your issue of December 7, 1907, the "Ten Years of the United States Navy"

Notwithstanding the historical part of this article is reduced to the most simple facts, I was sorry to perceive it is not anywhere stated that the Dutch government was the first to follow the basin experiments of Mr. William Froude, by constructing a model basin at the Amsterdam dock yard more than thirty years ago. The basin was built and the first experiments were made by Mr. B. J. Tideman, at that time chief naval constructor of the Dutch navy. According to information received from one of my friends, a naval architect, the results of these experiments, obtained in 1875-76, were published in the "Memoriaal van de Marine" (Memorial of the Dutch Navy). Further data are given by P. Dislère in his "Exposé Sommaire des Expériences faites à Amsterdam sur la résistance des Carènes," 1878; C. Busley in his work, "Die Schiffs-maschine," Vol. II., 1886; J. Pollard and A. Dudebout in their treatise, "Théorie du Navire," 1894. The Dutch installation rendered great service in

many directions. Even the Russian government had recourse to it, not only for defining the form, but also for calculating the resistance of the well-known 'Livadia.'

It is generally acknowledged that in regard to speed, predicted by Mr. Tideman, the "Livadia" was quite a success.

J. K. E. TRIEBART, C.E.

Nijmegen, Holland.

[It is well known that Tideman made a number of model experiments and also valuable experiments on plane friction. In Naval Constructor Taylor's "Resistance and Propulsion," published nearly fifteen years ago, are tables giving coefficients of frictional resistance obtained by Tideman, however, made his experiments, not in a model basin, but in a dock in the Royal Dockyard at Amsterdam, using more or less improvised and temporary appliances, some of his apparatus following along the lines of Beaufoy, who made experiments in the Greenland dock at Deptford more than a hundred years ago. It appears certain from consulting one of Tideman's original papers that some of his model experiments were made in a dock over a portion of which there was a shed open at one end. He speaks of having been careful to avoid making experiments on windy days and gives the specific gravity of the dock water. It is quite possible to make model experiments without having a model basin, and the French made model experiments many years ago in a dock at Brest, although they did not build a model basin until a year or so ago. Many people have made model experiments in open water-Herreshoff, for instance in this country. It does not seem, from the best information, that Tideman's experiments were made in a model basin, or that the Dutch navy ever built a regular model basin.

With reference to the "Livadia," it may be remarked

that, in addition to Tideman's model trials, a good-sized boat representing the "Livadia" and supplied with its own power was built by the contractors for the "Livadia" and tested near Glasgow, just as the contractors for the "Mauretania" in the last few years built a 50-foot self-propelled model of the vessel.]

II .- THE BRITISH NAVY OF TO-DAY.

About ten years have elapsed since the Scientific AMERICAN published a series of articles on the leading navies of the world. On December 7, 1907, we devoted a special issue of the SCIENTIFIC AMERICAN to a description of the American navy of to-day; and we now propose to publish, at stated intervals, a series on the leading navies of the world, which will enable our readers to compare our standing with that of the other great powers. In the interval which has elapsed since the Spanish war, the growth of naval power has been something phenomenal. During the same decade, and mainly as the result of the lessons of the Japanese war, there has been a marked change in the theory of warship design and construction. The big battle-ship, armed exclusively with heavy guns, has taken a more commanding position relatively to other types of ships than it held before. It is realized to-day, more than ever, that it is the big, heavily-armored ship, carrying a large number of the heaviest weapons, that will be called upon to decide the issues of future naval campaigns. Certain types of ship, which ten years ago were popular, and were built in large numbers and of great size, have become practically obso-lete. New types have been developed; and increased importance has been given to certain other types which were formerly considered of subordinate value.

The ideal navy of to-day concentrates the greatest part of its numbers and displacement in battleships; and to these all other types of vessel are considered as auxiliary. Next in importance to the battleships are the armored cruisers; but the latest design of these has become so large and powerful, that they have merged into the battleship class, and the indications are that as a distinct class the armored cruiser will The fleet of the future will consist disappear. of battleships, fast scouting vessels, sea-going torpedo boats, and submarines. The protected cruiser has had its day and those that exist will be retained merely for scouting purposes and the protection of sea-going

The policy of Great Britain, as affecting the relative strength of its navy, is the same to-day as ten years ago. She aims to maintain a navy which will be fully equal to that of any other two naval pow a task which, because of the rapid growth of her competitors, is becoming exceedingly onerous

SUMMARY.—In the present articles we shall follow the method of classification adopted in the well-known Brassey's Annual, and include under the head of first-class battleships, all those which are less than twenty years old and of 10,000 tons displacement or over. On this basis we find that the British navy possesses in battleships built or nearing completion, fifty-five first-class battleships of an aggregate displacement of 809,450 tons. Of second-class battleships and coastdefense ships she has eleven, of an aggregate displacedefense ships she has eleven, of an aggregate displacement of 113,780 tons. Of first-class cruisers, ranging from 9,800 tons to 17,250 tons displacement, and from 20½ to 25 knots speed, she has forty-eight of an aggregate displacement of 584,750 tons. Thirty-eight of these vessels are of the armored cruiser type, and ten of them are protected cruisers. She has twenty-seven second-class cruisers of from 5,600 tons to 7,700 tons displacement, and from 19 to 20 knots speed; their aggregate displacement is 169,510 tons. Of thirdclass cruisers she possesses forty-six ships aggregating 148,735 tons, whose displacement varies from 2,135 tons to 4,360 tons, and the speed from 19 to 22 knots. Her torpedo-boat destroyer fleet includes 160 vessels of from 240 to 800 tons displacement, and from 25 to 37 knots speed. Her submarine fleet consists of sixtyone boats built or building, varying in displacement from 120 to 500 tons, and with a speed on the surface of from 8 to 16 knots.

BATTLESHIPS .- Among the fifty-five battleships of the Battleships.—Among the fifty-five battleships of the British navy, the oldest are the eight ships of the "Royal Sovereign" class, built under the Naval Defense Act and launched in 1891 to 1892. Because of their great size, they created a sensation somewhat similar to that which marked the appearance of the "Dreadnought;" for they were a great advance upon any existing battleships. They are of 14,100 tons displacement, and on trial the "Royal Sovereign" made a speed of between 18 and 19 knots. They are protected by an 18-inch belt of compound armor, which teeted by an 18-inch belt of compound armor, which covers about two-thirds of the length of the vessel amidships, but they have no belt armor at the ends, where protection is afforded only by a curved but heavy protective deck. They are what are known as "soft-ended ships," and, as the fate of the "Osliabia" proved at Tsushima, they would be at the mercy of a well-directed heavy-gun fire striking their unarmored They carry four 13-inch low-velocity guns, in barbettes which afford protection to the gun carriage and turning gears, but none to the guns themselves. The secondary armament consists of ten 6-inch guns mounted in closed 6-inch armor casemates, five on each broadside. The present sea speed of these ships is from 14 to 15 knots an hour. One of the class, the "Hood," was built with her 131/2-inch guns mounted in turrets on the main deck. Her freeboard is only about 12

feet, and she is, consequently, a wet ship in heavy weather. The "Barfleur" and "Centurion," of about 11,000 tons displacement and 18.5 knots trial speed, carry four 10-inch and ten 6-inch guns. They are protected by a partial 12-inch belt of compound armor. They were launched in 1892, and, though fast, are not considered to be ships of great value to-day. A little larger than these is the "Renown," of 12,350 tons and 18 knots trial speed, whose main armament consists of four 10-inch guns. She is not of any consists of four 10-inch guns. She is not of any greater value than the "Barfleur," and at present is used as a naval yacht for the conveyance of dignitaries to distant stations. The next important battleships were those of the "Magnificent" class of nine ships, launched between 1894 and 1896. They are of 14,900 tons displacement, and mark a considerable advance in fighting efficiency over the "Royal Sovereign" class. In them for the first time Harveyized armor was adopted, of which they carry a 9-inch belt amidships; but they also are soft-ended vessels. The main arma ment consists of four 12-inch 35-caliber and twelve inch 40-caliber guns. The belt is carried up in its full thickness to the main deck, and the waterline protection is amplified by carrying the sloping edge of the protective deck down to the bottom of the belt, the slopes being 4 inches in thickness. Except for the soft ends and the comparatively low velocity, 2,300 feet per second, of the 12-inch guns, these are excellent ships for their time, having the large coal capacity of 2,000 tons with an additional storage for 400 tons of

The "Canopus" class of six ships, launched b 1897 and 1899, are about 2,000 tons smaller than the "Magnificent" class but they have a higher speed and a larger coal supply. On trial they made from 18 to 18½ knots, and they have a maximum storage capacity of 2,300 tons of coal. To secure these last qualities the armor was seriously cut down, the belt, which in these ships is continuous, having a maximum thickness amidships of only 6 inches, although it is assisted by a protective deck which is 2½ inches on the slopes. They carry four 12-inch 35-caliber guns in barbette turrets, protected by 12-inch and 8-inch armor, and twelve 6-inch 40-caliber guns in casemates of 5-inch armor. In the next six ships, of the "London" and "Formidable" classes, the displacement was raised to 15,000 tons and the sea speed to about  $18\frac{1}{2}$  knots, a speed which has been equaled and even exceeded on their recent sea trials while in service. They are protected by continuous belts which are 15 feet wide by 9 inches in thickness, and in these ships the first use was made of Krupp armor. Back of the 9-inch belt are the slopes of the protective deck, which are 3 inches They mount a powerful wire-wound 12thickness. inch gun of 40 calibers length and 2,750 foot-seconds velocity. Each ship carries four of these in 12-inch barbettes with 10-inch turret protection. The second-ary battery consists of twelve 6-inch 45-caliber guns. mounted behind 6-inch armor, in completely inclosed casemates. These are among the best ships in the British navy. They are fast steamers, and have a coal capacity of 2,100 tons. They are well protected, and the armament of high-velocity, wire-wound guns up-to-date.

Next in order of construction are the five battleships of the "Duncan" class, all launched in 1901. These are among the best steamers in the British battleship fleet; for they made recently in a sea trial, while on active service, speeds of from 19.4 to 20.1 knots. Their displacement, however, is 1,000 tons less than the preceding class, and, since they carry the same armament, protection had to be sacrificed, and the thickness of the belt was cut down to 7 inches, with a 2½-inch sloping deck. In 1902 the battleships "Queen" and "Prince of

Wales" were launched. In them the displacement was raised to 15,000 tons and the thickness of the belt was restored to 9 inches; the armor in these, as in the three preceding classes, being of Krupp steel. The 12-inch 45-caliber guns are mounted in 12-inch bar-bettes, with 10 inches of armor on the turrets. Twelve 6-inch 45-caliber guns are mounted in separate, completely inclosed, casemates, with 6 inches of armor on The sea speed on the last trials was rethe face. spectively 18.2 and 18.6 knots.

In 1903 the government purchased from Chili two battleships which are now known as the "Swiftsure" and "Triumph." They are of 11,800 tons displacement, and the armor plan shows 10 inches on the barbettes, 8 inches on the turrets, and a 7-inch continuous belt. The 7-inch side armor is carried up amidships to the upper deck, from main turret to main turret, and behind this protection are mounted ten 7½-inch 50caliber guns, while in four casemates on the upper deck are four more of the same weapon. The main battery consists of four 45-caliber 10-inch guns. is an exceedingly powerful armament, the  $7\frac{1}{2}$ -inch gun firing a 200-pound projectile with a velocity of 2,800 feet per second. The ships have a sea speed of over 19 knots an hour, and they carry a maximum supply of 2,000 tous of coal.

In the "King Edward VII." class of eight ships,

launched between 1903 and 1905, the big armor-piercing gun makes its appearance for the first time in this navy in the secondary battery. The ships are of 16,350 tons displacement, and the armament consists of four 45-caliber 12-inch, four 45-caliber 9.2-inch, and ten 6-inch guns. They have a 9-inch belt, above which is a wall of armor 8 inches and 7 inches in thickness extending to the upper deck. The 12-inch guns are mounted in 8-inch armored turrets above 12-inch barbettes, and the 9.2-inch guns are carried in four 7inch armor turrets, two on either broadside. ships carry 2,150 tons of coal and 400 tons of oil, and they have a sea speed of from 18.7 to 19.4 knots an

From now on the influence of the Japanese war is shown in the British designs. The next two battleships, the "Lord Nelson" and the "Agamemnon," have about the same displacement as the "King Edward

VII." class, and they are of the 'all - big - gun type. mount four 12-40-caliber inch guns in 8-inch turrets on 14-inch armored bar upon the same upper deck they carry ten 9.2-inch 45-caliber guns in five single 7inch armor turrets. The armor proteclent, consisting of a continu ous belt 12 inches thick amidships, with 7 inches of armor protection extending from the belt to the upper The sides of these ships, therefore, are unpierced by any gun ports. and all the guns are carried within turrets, and from 25 to 27 feet above the water. The ships are of 18.5 knots ed. The excellent photo graph which we show of the "Agamemnon" was furnished us by the builders, Hawthorn, & Co. Leslie Ltd. Newcas tle - on - Tyne who inform us that her speed on her recent trial was 18.8 knots an hour The "Dread nought," which been cepted by the

world as the the future, marks a great type of ship of vance in size and power over any previous battleship. With an overall length of 520 feet and a normal displacement of 17,900 tons, she mounts 12-inch guns of the new 45-caliber pattern, with a velocity of 2,900 feet a second. The forward guns are carried on a forecastle deck whose freeboard is 28 feet. On either broadside, aft of these, is a two-gun The other two turrets are mounted on axis of the ship, as shown in the illustration. The elt is 11 inches thick, with a 2%-inch protective deck The barbettes have 11 inches of armor, and the turrets 8 inches. She is driven by four turbines at a speed of about 21 knots an hour. Three similar ships to the "Dreadnought," with about 700 tons greater displace ment, and mounting a more powerful 12-inch gun of 50 calibers length, are nearing completion, and three

others, to be known as the "St. Vincent" type, of be 19,000 and 20,000 tons displacement, have retween been laid down.

SECOND-CLASS BATTLESHIPS.—The second-class battleship and coast-defense vessels are of such doubtful value as to call for no detailed description here. is not unlikely that several of them will be used for similar target practice to that which was recently carried out on the old battleship "Hero."

ARMORED CRUISERS .- The first armored cruisers to be built for the British navy were the six 12,000-ton 22½-knot vessels of the "Cressy" class. Their leading characteristics are a 6-inch belt from bow to after casemates, a 3-inch deck, 6-inch protection (all of this armor being of the Krupp type) on the barbettes, and b inches on the casemates. All of the armored cruisers have a raised forecastle deck, giving a freeboard of from 28 to 30 feet forward. In the "Cressy" class, one

and one aft, and ten in 4-inch armored casemates e vessels can stow 1,600 tons of coal and 400 tons of oil, and they are remarkable for their high sea speed, which in the last trial on service ranged from about  $23\frac{1}{2}$  to  $24\frac{1}{2}$  knots an hour. In 1903 to 1904 six ships of the "Hampshire" class were launched. They are of 10,850 tons, and protected by a 10½-foot lelt 6 inches amidships. They carry four 7.5-inch 45-call-ber guns in four 5-inch armor turrets and six 6-inch guns in casemates. They stow 1,800 tons of coal, and have a speed of about 231/4 knots an hour. followed the "Duke of Edinburgh" and "Black Prinof 13,550 tons and about  $22\frac{1}{2}$  knots speed. They have a 6-inch belt, and are armed with six 9.2-inch 50-callber guns in six turrets and ten 6-inch 50-caliber guns mounted behind 6 inches of continuous side armor Similar to these in speed, displacement, and protection are the four ships of the "Warrior" class, which mount

six 9.2-inch 50-caliber guns in six 6-inch armor turrets and four inch 50 - caliber guns also rate 6-inch armor turrets. ships are of 23 knots speed, and car 2.000 tons of coal and 400 tons of oil,

In 1906 followed the three powerful ships of the Min otaur class, of 14, 600 tons displacement, knots speed, storing tons of coal and 400 tons of oil. They mount four 9.2-inch 50-caliber guns in two 2-gun turrets, one ward and one aft behind inch armor and ten inch 50-caliber guns in ten 6-inch armor turrets, all guns being mounted on the forecastle 0.1 the upper deck and having a command from 25 to 32 feet. There are now nearing completion the three mammoth armored cruisers of the · · Invincible class, of 17,250 tons displacement, designed to be driven at

> knots by


turbine engines

of 41,000 horse-

power. Their


armament

consists of




Displacement, 12,950 tons. Speed, 18.5 knots. Conl. 2,300 to turrets, 8-inch to 12-inch; case-twelve 40-caliber 6-inch; ten . Guns: four 85-caliber 12-inch; two

Battleship "Canopus." Class of Six Ships.




er. 12-inch. Date, 1907.

Armored Cruiser "Invincible." Class of Three Ships.




12,000 tons. **Speed,** 22.5 knots. **Coal,** 1,600 tons 6-inch; deck, 8-inch; turrets and casemates, 6-inch 9.2-inch; twel 45-caliber 6-inch; twelve 12 Torpedo tubes, two. Date, 1900.

Armored Cruiser "Cressy." Class of Six Ships.




Displacement, 14,900 tons. Speed, 17.5 knots. Coal, 2,000 tons. Oil 4-inch; casemates, 6-inch. Guns: four 35-caliber 6-inch; sixteen 12-pounders. Torpedo tubes, five. Date, 1895.

Battleship "Magnificent." Class of Nine Ships.



tons. Armor: belt. 6-inch; side, 6-inch; dec Guns: 'four 50-caliber 9.2-inch; ten 50-cal Torpedo tubes, five. Date, 1906.

Armored Cruiser "Minotaur." Class of Three Ships.



Speed, 23 to 24 knots. Coal, 1,800 Armor: belt, 6-inch; deck, 2-inch; turrets and casemates, 6-inch. Guns: four 7.5-inch; six 6-inch; two 12-pounders; twenty-two 3-pounders. Torpedo tubes, two. Date, 1903.

Armored Cruiser "Hampshire." Class of Six Ships. Also Ten Ships Somewhat Less Powerful.

THE BRITISH NAVY OF TO-DAY.

9.2-inch 40-caliber gun is mounted on the forecastle deck and another aft on the quarter deck. The second-ary battery consists of twelve 45-caliber 6-inch guns casemates on the gun and berth decks. ships were launched from 1899 to 1901.

In 1901 the fine and very fast vessels of the "Drake" class were launched. The particulars are: Displacement, 14,100 tons; speed, 23½ to 25 knots; battery, two 9.2-inch 45-caliber and sixteen 45-caliber 6-inch guns; and the armor consists of a 6-inch belt, a 3-inch deck and 6 inches of protection on the barbettes and case mates.

Between 1901 and 1903 were launched ten armored cruisers known as the "County" class, of 9,800 tons displacement, with an 111/2-foot belt 4 inches thick amidships, and carrying fourteen 6-inch 45-caliber guns, four in two 5-inch armor turrets, one forward

eight 12-inch 45-caliber guns, mounted in four turrets so disposed that six guns can be fired ahead or astern and eight on either broadside. These ships are to have about 7-inch waterline protection, and they will be practically bat-

tleships in their powers of offense and defense.
PROTECTED CRUISERS.—The protected cruiser has had its day, and in the British navy none of its class has been built for some years. Great Britain possesses no less than eighty-three of this type, ranging in displacement from 2,135 tons to the 14,200 tons of the "Powerful" and the "Terrible." The larger vessels carry two The larger vessels carry two 9.2-inch guns in turrets and from twelve to sixteen guns in casemates. Their future duties will be confined to scouting; the convoy and protection of merchant ships; and to station duty. They will never lie in the line of battle, except against vessels of their own class. It is probable that during the next few years the majority

4 six

rrets 7.5-- (al-

uns

rets.

nots tons

fol-

erful the

14,dis-23 e d,

coal

hey

our calin

ber ten

all the


a o f 32

ng he m-

ed he

50


ed at by

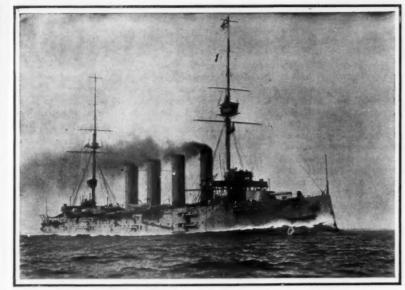

100 tons. Speed, 24.5 knots. Coal, 2,500 tons. Armor: belt, 6-inch: side armor, and casemates, 6-inch. Guns: two 46-caliber 9.2-inch; sixteen 46-caliber 6-inch.


Torpedo tubes, two. Date, 1901.

Armored Cruiser "Good Hope." Four Ships.

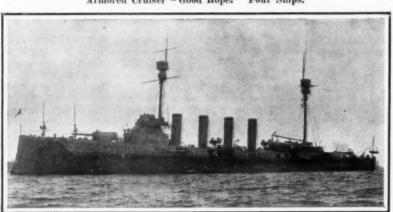


Displacement, 13,550 tons. Speed, 22.5 knots. Coal, 2,000 tons. Oil, 400 tons. Armor: belt, 6-inch; side, 6-inch; deck, 1-inch; barbette turrets, 6-inch to 7-inch; casemates, 6-inch. Guns: six 50-caliber 9.2-inch; four 50-caliber 7.5-inch; twenty-dwe-3-pounders. Torpedo tubes, three. Date, 1905.

Armored Cruiser "Achilles." Four Ships.

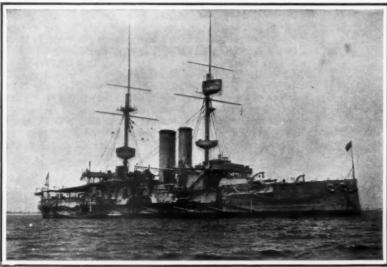

Displacement, 12,950 tons. Speed, 18.5 knots. Coal, 2,300 tons. Armor: belt, 6-inch; side, 6-inch; deck, 2\(\frac{1}{2}\)-inch; barbette turrets, 8-inch to 12-inch; casemates, 5-inch. Guns: four 35-caliber 12-inch; twelve 40-caliber 6-inch; ten 12-pounders. Torpedo tubes, four.


Battleship "Ocean." Six Ships.

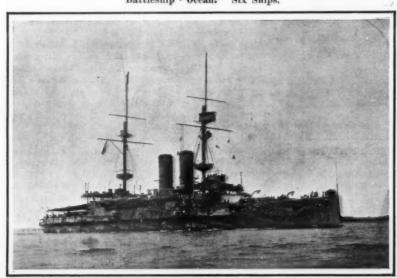


Displacement, 14.000 tons. Speed, 19.5 knots. Coal, 2,000 tons. Armor: bell, 7-inch; side, 7-inch; deck, 2½-inch; barbette turrets, 6-inch to 11-inch; casemates, 6-inch. Guns: four 40-caliber 12-inch; twelve 45-caliber 6-inch; sixteen 12-pounders. Torpedo tubes, four. Date, 1901.

Battleship "Russell." Five Ships.

Photos by Symonds & Co.

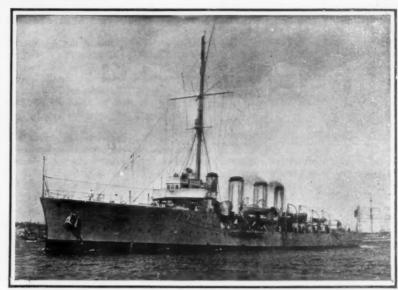


Displacement, 2,670 tons. Speed, 25.6 knots. Coal, 380 tons. Armor, 2-Inch deck. Guns: ten 12-pounders; eight 3-pounders. Torpedo tubes, two. Date, 1994.

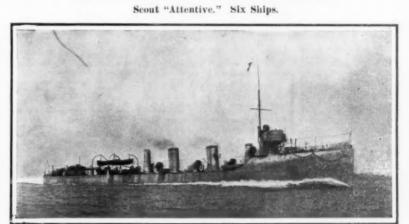


Displacement, 765 tons. Speed, 34 to 36 knots. Oil, 95 tons. Guns, three 12-pounders. Torpedo tubes, two. Date, 1907.

Destroyer "Mohawk." Five Boats.

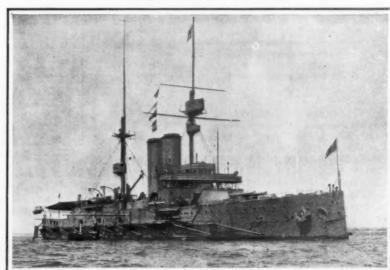

Displacement, 16,850 tons. Speed, 194 knots. Coal, 2,150 tons. Oil, 400 tons. Armor: belt. 9-inch; deck, 2-inch; side armor, 7-inch to 8-inch; turrets, 12 inch and 7-inch. Guns: four 40-caliber 12-inch; four 45-caliber 9,2-inch; ten 6-inch. Torpedo tubes, five. Date, 1903.

Battlesbip "King Edward." Eight Ships.

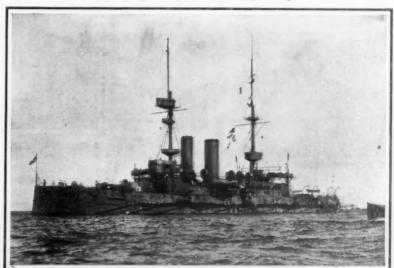

ons. Speed, 18.5 knots. Coal, 2,100 tons. Armor: belt. 9-inch; side arets 10-inch to 12-inch; casemates, 6-inch. Guus; four 40-caliber 12-linch; sixteen 12-pounders. Torpedo tubes, four. Date, 1898-1902. Battleship "Bulwark." Eight Ships.

Photos by Symonds & Co. THE BRITISH NAVY OF TO-DAY. of them will be stricken from the active list.

Scours.-The place of the protected cruisers has been taken by a new type known as scouts; vessels of from 2,800 to 3,000 tons displacement and 25 to 251/2 knots speed. They carry only a light armament of 12-pounders to repel torpedo-boat attack. They are intended to serve merely as the eyes of the fleet, keep ing in touch with the enemy and bringing the fighting battleships and armored cruisers, into with each other. Great Britain possesses six of these els. Because of their small coal supply of only 380 tons, they are considered to be of doubtfu value. The new ships of this class will be enlarged, to enable them to carry enough coal for extended operations with the fleets.

DESTROYERS .- The British navy possesses a fleet of destroyers of exceptional speed and good seagoing qualities. It is impossible within the limits of this article to describe these ships in any detail. range in size from the early vessels of about 270 tons displacement and 27 knots speed up to the latest, of what is known as the "Tribal" class, which are of about 800 tons displacement and 35 to 37 knots speed The majority of the boats are of about 350 tons displacement and 30 knots speed. In 1903 to 1905 the size was increased to 550 tons, the scantling was made heavier, and the speed lowered to 251/2 knots, the idea being to provide vessels of stancher build and better seagoing qualities. Some thirty-four of this type were built; but in the latest "Tribal" class, above referred to, length has gone up to 272 feet, the horse-power 14,500, and the maximum speed to from 35 to 37 knots. destroyer, the "Swift," is now under construction, which is 345 feet in length and is designed for a speed of 36 knots with 30,000 turbine horse-power. The later and larger destroyers are all driven by Parsons tur-bines, and the boilers fired with oil fuel.

SUBMARINES .- When England once took up the con struction of submarines, she developed the type with characteristic energy. She now possesses forty of these vessels completed, and has twenty-one others The vessels already proposed or under construction. built or building range from 120 tons to 500 tons dis-placement, from 8 to 16 knots surface speed, and from 7 to 9 knots speed submerged. The first five were of the Holland type, and out of this the government evolved what is known as the Admiralty type which combines the principles of both the Holland and the Lake submarine, the regulation of horizontal control being assisted in the later submarines by the use of hydroplanes.

#### The Current Supplement.

The use of pneumatic tools in iron foundries is the subject of the opening article of the current Supple-MENT. No. 1679. Although the action of the various constituents of the atmosphere on copper, tin, zinc, and their alloys is of great practical importance, it has never been studied systematically. The first step this study has been made by Eduard Jordis and W. Rosenhaupt for oxygen. The results of their investigations are given. Those who advise women to adopt the profession of engineering should read Karl Drews's article on Women Engineers. He very clearly outlines the magnitude of the obstacles which women must surmount. Mr. R. T. Strohm writes on boller blow-off connections, and gives various diagrams the systems now used. The theory of high-speed tool is discussed by George Auchy. Sand hogs and the work they do constitute the subject of a very interesting article, in which the caisson foundations of sky-scrapers are described. A short but valuable article is that which tells now at the expense of a dollar or so a Nodon valve may be constructed, which connects through any lamp socket with the alternating system and serves as a rectifier. C. K. Francis shows how much water is required for the setting of Portland cement. The geology of the inner earth and the formation of iron ores is the subject of a paper The geology of the inner earth and by Prof. J. W. Gregory,

Hudson-Fulton Celebration.

At a recent meeting of the Hudson-Fulton Celebration Commission, it was voted to hold the celebration in 1909 one week later than planned, making it begin on Saturday, September 25, in order to insure a greater probability of good weather. It was decided to hold the official literary exercises in the Metropolitan Opera House on Tuesday evening, September 28, with possibly other meetings in the other boroughs

According to The Engineer, amalgams for the fricparts of electric machines are combinations of quicksilver tin, and zinc. The quicksilver is heated to 302 to 392 deg. F., transferred to a wooden box, the melted tin and zinc added to it, the box closed by a lid and mixed by vigorous shaking. The proportions of the mixture, according to Singer, are (a) 6 parts of quicksilver, 2 parts tin, 1 part zinc; (b) 7 parts quicksilver, 4 parts zinc, 2 parts tin; various other proportions of these ingredients are sometimes used.

#### Scientific American

#### A SIMPLE WIRELESS TELEGRAPH DETECTOR.


BY FRANK J. KENNEY.

One of the requisites of a good wireless telegraph detector of the crystal type, is that it be so constructed as to permit easy removal and substitution of different metals for the electrodes, as different metals some

times produce different results.

The necessary parts of a simple yet very efficient wireless detector are as follows: A base, of the dimensions shown in Fig. 1; 3 inches of ½-inch round brass rod; 4 inches of 3/16-inch round brass rod; some brass tubing, 3/16 inch inside diameter; two thumb nuts of brass or hard rubber, and two binding posts.

The 3/16-inch rod is cut into two equal parts, and both pieces threaded to within % inch of one end. The other rod is also cut into two equal parts, mak-



-Details of the Construction of the Wireless Telegraph Detector.





Fig. 2.-Electrical Connections of the Wireless Telegraph Detector



A SIMPLE WIRELESS TELEGRAPH DETECTOR.

ing a pair of standards. At 1/4 inch from the top of each of the standards a hole is drilled and tapped to The other end of each stanreceive the smaller rods. dard must also be drilled and tapped to receive a machine screw, by which it is fastened to the base. positions of the standards on the base are indicated on the drawing. The smaller or pressure rods are screwed in the holes on the standards, with the untapped ends facing each other, and the thumb nuts, having previously been tapped to fit the rods, are screwed on them.

The binding posts must now be mounted on the and connected to the standards by wires run underneath the base.

To make the removable electrodes, the brass tubing is cut in %-inch lengths. One-inch disks of 1/16-inch brass, copper, and other metals are cut out, and at the exact center of each is soldered one of the brass tubes, with its length perpendicular to the disk. When it is desired to use them, the tubes are slipped over the ends of the rods, a crystal placed between them, and the rods screwed up so as to hold the crystal in place. Carborundum and silicon are the most comm tals, although there are many others that produce excellent results.

#### An American Agricultural Mission.

BY S. C. STUNTZ.

The demand for our young men as instructors in farm practice for other nations, whether for the tropical cultures of Liberia, for tobacco culture in South Africa, or for other cultures elsewhere, is attracting so much attention at present, that we incline to think of the position of the United States as instructor as something new. Nothing, however, is farther from the truth than this.

As early as 1813, but twenty years after Eli Whitney's invention had made possible the profitable production of cotton on a large scale in our Southern States, the Madras Presidency, realizing the American supremacy in cotton producing, sent out Bernard Metcalfe, who had had considerable practice in cleaning cotton with the saw gin in Georgia and Louisiana, to experiment with the American gins in several Indian cotton districts. His labor was in vain, for the natives would not give up their old-fashioned implements for the gin. The churka, as the native implement was called, consisted of two slightly separated rollers turned by hand, which, while removing the seeds, left the cotton matted, with fibers running in different directions, and entirely failed to remove the bits of leaf ard broken seeds and other trash.

After Metcalfe's attempt, the Madras government continued its efforts to improve the domestic cotton and to naturalize New Orleans cotton until 1840, when the Court of Directors, resolved on making a further attempt to bring the Indian cotton up to successful competition with the American, sent Capt. Bayles of the Madras army to the South to secure ten planters or overseers to instruct the natives in the cultivation and cleaning of cotton. These planters were to receive \$1,500 per annum and a gratuity in case of suc-

The captain, fearing opposition, succeded in keeping his secret for some time, but when he had engaged a few planters, and bought a sixty-saw gin, a model gin-house, and other necessary machinery, the matter leaked out. The Natchez papers of April, 1840, with their numerous editorials and communications, show the jealousy with which the southern planters looked upon the British enterprise. Capt. Bayles was unable to get any planters in Georgia or South Carolina, and went to Mississippi and Louisiana, where obtained eight and two respectively. Of these, the Mississippi Free Trader and Natchez Weekly Gazette of April 9, 1840, speaks as follows:

Those persons who have lent themselves, or rather sold themselves, body and soul, for English pound sterling, will leave our shores (if they ever leave with the undisguised hate and scorn and exe cration of every southern man in the United States."

One of the correspondents of this paper sees in this

movement, following as it did the British abolition of slavery, a menace to the slave-holding population of the United States.

No serious results' followed the threats of the paper, though the captain felt it necessary to carry arms in fear of a personal attack. The captain and the ten planters arrived at their destination in October, 1840, after a stop in London. The results of their experiments, which closed in 1853, showed that American cotton could be grown, but with questionable profit; that Indian cotton might be improved, but only slightthat American cotton would always command a higher price than Indian; and that the demand for the Indian cotton would always depend on the supply of the American. The planters who undertook the work all returned to the United States with the exception of one, who died at his work in 1846.

This interesting example of early agricultural mis-

sion effort will show the difference in point of view between 1840 and the present day, when we welcome every opportunity to share our trained students of agriculture with the rest of the world, in the realization that we are in every way the gainers from such acts of apparent altruism.

Ivory-Colored Enamel for Iron Goods.-Melt a mixture of 125 parts of pulverized flint glass, 20 parts of calcined soda and 12 parts of boracic acid. The molten mass is poured onto a stone or metal surface, allowed to cool and pulverized. A mixture of this powder and soda water-glass solution of 50 deg. B., to which about 8 parts of oxide of tin have been added, is poured over the objects to be enameled, which are then heated in a muffle until the entire mass is uniformly melted.

strip of stamps is conducted down through a throat F



IMPROVED NUT LOCK.

A patent has just been issued on an improved nut lock which we illustrate in the accompanying engraving. The device may be used in any connection, but is particularly adapted for rail joints to prevent the nuts from working loose on the bolts which fasten the fish plates in position. The device comprises a plate A, which in practice is placed against the fish plate and is formed with openings to admit the bolts. The nuts are screwed on to the bolts and against the plate A. To retain them in this position locking rings B are provided. As shown in the detail view




IMPROVED NUT LOCK

these are formed with notched openings, the arrangement of the notches being such as to enable the locking ring to engage the corners of a hexagonal, or a square nut, or a similar nut in different positions. At a suitable point on the outer edge of the locking ring, number of outwardly projecting fingers C are provided. The locking rings are fitted over the bolts as shown in the illustration. To the left of each locking ring the plate A is punched to form transverse bars D with serrated upper edges. A wire E which is made fast to the plate A at one end is hooked under one of the fingers C and its outer end is caught in one of the bars D, thus preventing the locking ring from turning and holding the nut in set position on The method of attaching the wire E to the plate is rather interesting. The wire is formed with a vertical section hooked both at the top and bottom. The plate is provided with tongues bent outward to form pockets in which the hooked ends of the wire are seated. To one side of the upper pocket a notch is cut in the plate so that in attaching the wire the lower end is first hooked and then the upper end is passed through the notch and laterally moved into the A patent on this nut lock has been by Mr. C. B. Stillwell, of Jacksonville, Florida.

#### STAMP-AFFIXING MACHINE.

A machine has recently been invented for quickly and accurately affixing postage stamps to letters and other matter. The machine comprises two frames, A and B, which are hinged together. The handle is secured to the frame B. A spring C is mounted between the frames A and B, on a screw which limits the relative motion of the two frames. The stamps are rolled with a strip of oiled paper on a spool which is contained in a casing D, and a spring bearing on the roll provides the necessary tension. The strip of oiled paper is carried down under the frame A, and at the forward end thereof is taken up on a spool E. The



STAMP-AFFIXING MACHINE,

and close to a roller G, which is held in the normal position illustrated in Fig. 1 by springs H. A moistening pad J is provided directly in front of the roller G and this is connected to a pair of wheels K. The latter are flattened at one side. Connecting the wheels K with a drum on the shaft which carries a spool E is a cord L, provided with a spring. This drum carries a pawl which engages a ratchet on the spool E. A spring M connects the opposite side of the drum and M. It

with the frame A. In use the operator rolls the machine forward, on the wheels K, thereby turning the spool E to take up the slack in the oiled paper, and also turning the spool which carries the stamps. When the flat part of the wheel K is encountered the machine will drop, and moistening pad J will be lifted out of contact with the letter, on which the stamp is to be affixed. The roller G will then be brought into contact with the letter and will press the stamp on to the moistened part. At the same time the roller G will travel bodily toward the rear of the machine and spring a trigger N, permitting the frame B to drop and bringing a depending plate thereon against the stamps close to the throat F. This will hold the stamp strip and cause the stamp to be detached therefrom. At one side of the machine a bulb O is provided in which water is kept to moisten the pad J. The inventor of this stamp affixing machine is Mr, Herman J. Wertz-

# IMPROVED PLANE PROVIDED WITH ADJUSTABLE GUIDES,

berger, of Alma, Kansas.

The improved plane which we illustrate herewith is provided with adjustable means to limit the depth to which the cut of the plane may proceed. Guide blades are provided at each side of the plane which may quickly adjusted. Means are also furnished for limiting the projection of these blades. In our illustration the body of the plane is shown at A. A recess is formed in the body to admit the blade or iron, and the side of the body is cut away, forming an opening through which shavings cut by the blade can leave the Secured to one side of the plane is a guide plate B. The latter is made fast by a pair of screws which pass through slots in the plate and thus permit of any desired degree of adjustment of the plate below the sole of the plane. In the forward end of the tool a block is mounted to slide vertically and it may be moved to the desired adjustment by means of a thumb screw. Adjustably secured to this block by means of screws are a pair of guide blades C. The guide blades in operation form parallel grooves or guides exactly within and between which the main iron follows and cuts the shavings. The motion of these guide blades is limited by shoulders on the blades and the plane. Directly in front of the guide blades at one side is an auxiliary guide or supplemental sole D. This is secured to the lower end of a rod F. A transverse pin E formed with a cam groove is adapted to bear against the rod F and hold the latter at the desired adjust-A pin G engages a second groove in the trans verse pin E and serves to retain the latter in the tool. The plane is provided with the usual rack and pinion adjustment of the plane iron and a thumb screw serves to lock the blade in the set position. The inventor of this plane is Mr. Andro Nylund, of 5514 Nicolett Street, West Duluth, Minn.


#### AN IMPROVED WASHING MACHINE.

The washing machine illustrated in the accompanyengraving is provided with improved means for enabling the working parts to be brought into rubbing contact with both sides of the fabric which is being washed, and at successively different points thereon so that the entire piece of material may quickly and thoroughly be renovated. The machine comprises a suds box A. At the forward end of the machine are two upright frame members B, each formed with a Mounted to slide in these slots is a corruslot C. gated rubber board D. The frame which carries this board is connected to a crank E at the upper part of the machine. The crank is secured to the hub of a the machine. wheel G, which is geared to an internal gear F. By turning the wheel F the crank E is revolved, causing the rubber board D to vibrate up and down. the board D is a second corrugated board H. The latter is secured to a frame J, which is held in suspension by a pair of links K. The upper link K is made fast to a square shaft which carries a lever L, and by operating this lever the board H may be moved toward or from the board D, as desired. The lever L may be hooked in the rack M, to hold the board H at the desired position. Journaled in the frame members J are a pair of rollers N. The upper roller is mounted to slide in vertical grooves, and springs O serve to press it against the lower roller N. sion of each spring may be regulated by operating a hand wheel, as indicated in the illustration. In use after the garments have thoroughly been soaked the board H is rocked away from the board D to permit placing the garments between the boards. The lever L is then adjusted to press the garments between

the boards and by means of a crank handle the rollers are turned to draw the material downward. The board D is now reciprocated to rub the garment and occasionally the rollers are turned to bring a fresh surface into contact with the rubber boards. A patent on this washing machine has just been secured by David A. Sawyers, of Unionville, Iowa.

#### Annual Loss Caused by the Cattle Tick,


It has been calculated that the cattle tick causes an annual loss in this country of nearly \$100,000,000,



IMPROVED PLANE PROVIDED WITH ADJUSTABLE GUIDES.

according to a report of the Department of Agriculture. The loss foots up to at least 10 per cent of the value of the cattle raised every year. The quality of the stock attacked is lowest and the loss is the greatest in the regions where, without the tick, the natural conditions are most favorable to the production of the finest cattle with the least loss. This insect makes profitable cattle raising almost impossible in the South, and as any successful system of agriculture must be grounded upon an alternation of crops which, in turn, depends upon animal husbandry to maintain the fertility of the soil, our entire national system of agriculture is affected. Until this pest is destroyed, or at least controlled, the agricultural development of the infested regions is impossible.

Capt. Robert T. Lawless, who for many years has been in the employ of the Oceanic Steamship Company, has been proposed for membership in the Royal Geographical Society of England, owing to his invention of the stellar azimuth machine. This instrument solves spherical triangles mechanically, and with absolute accuracy, and makes unnecessary the use in navigation of an azimuth table. Capt. Lawless believes that every officer of every passenger liner should understand stellar navigation. The compass, he says, is the most useful of instruments, but the most frivolous and vacillating, and requires constant watching and testing. The compass should be checked up every four hours, and even then it may play tricks on the most experienced navigator. However, the stars are always true beacons, and the navigator who can steer by star sight, says Capt. Lawless, can be as sure of his course as if he had cross-bearings between two lights.



AN IMPROVED WASHING MACHINE.

#### INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending February 25, 1908.

AND EACH BEARING THAT DATE

[See note at end of list about copies of these ]		'
Abdominal supporter, M. Donaldson	880,444 879,917 880,034 880,159	99
Adding machine momentum absorber, Mc- Farland & Wales Wales Advertising device Selection of the Manager of the	880,158 880,254 879,848 879,861	
	880,378 880,161 880,125 880,187 880,311	
Album, R. Krumming. Albumholds and the composition of matter produced therefrom, treating, M. R. Banacs Ale dispenser, automatic ginger, J. H. Earl Annalgamator, J. M. Barnes. Amusement apparatus, H. Hill. Animal shears, T. A. Martin. Anvil, H. E. Sheward. Arsenical ores, reducing, G. M. Westman, 879,331.	879,967 880,370 879,999 879,872 879,973 880,335	8
Automobile, A. H. Dingman	879,932 880,202 880,117	
& Rogers Automobile steering gear and axle, M. P. Henvis Automobile torpedoes, ignition device for.	880,450 880,029	
Automobile steering gear and axle, M. F. Henvis Automobile torpedoes, ignition device for, F. M. Leavitt Automobile torpedoes, starting device for, F. M. Leavitt Ax attachment for sawing logs, L. Smith. Axle, vehicle, S. E. Kimbail. Bagging cutting machine, R. Clark Bagging cutting machine, R. Clark Miller & Carlson Balloon, dirigible, A. Gerstner. Barber's pole, O. E. Smith. Bartery F. A. Decker., 889,196, 889,367, Battery plate, storage, A. O. Taggette, 196, 196, 196, 196, 196, 196, 196, 196	880,030 880,412 880,145 880,194	ton
Miller & Carlson Bailoon, dirigible, A. Gerstner Barber's pole, O. E. Smith Bartery, F. A. Decker., 889,136, 839,367, Battery plate, storage, A. O. Tate, 889,420 to 889,420 to	879,975 880,070 879,984 880,368 880,425	¥.
W. J. O'Hara liearing, self-oiling, E. B. Treat. Reit and support for abdominal treatment, H. T. Renton	880,238 880,428 880,041	-
Belt, distributing and conveying, T. J. Carter fer Beverage cooling and dispensing apparatus, J. R. Hallevan. Binder, loose-leaf, C. S. Breadwell. Binder, temporary, C. D. Trussell. S79,928. Binder, temporary, H. Wiedeman. Bleaching apparatus, cotton, J. B. Brennan. Block signal systems, signal mechanism for, H. L. Johnson. Boat launching apparatus, J. Forcier. Boalte compound, J. L. Cooper. Boiler formace, S. S. Spivey. Boiler parifying device, steam, W. P. Wie- mann.	880,356 880,075 880,352 880,053 880,473 880,005	-
H. L. Johnson Hont launching apparatus, J. Forcier Bout, speed, G. A. Farrell Boiler compound, J. L. Cooper Boiler fornace, S. S. Spivey Boiler parfying device, steam, W. P. Wic-	880,218 880,018 879,860 880,126 880,175	_
mann Book covers, machine for making, A. Mug- Borling machine, W. S. Sherman. Bottle, J. L. Kendrick. Bottle cap applying machine, E. D. Schmitt Bottle stopper, M. Schwind.	879,930 880,033 879,918 880,082 880,407 880,331	FEGOROTO FF
mann Book covers, machine for making, A. Mug- Borling machine, W. S. Sherman Bottle, J. L. Kendrick Bottle, J. L. Kendrick Bottle, J. L. Kendrick Bottle at applying machine, E. D. Schmitt Bottle stopper, M. Schwind Bracelet, S. L. Lederer Brossing machine, M. Smith Bracelet, S. L. Lederer Brossing machine, M. Smith Broom cover, W. S. Lodge Brush, air, J. A. Pansche Brush air, J. A. Pansche Brush holder, A. Ball. Brush holder, A. Hetherington Buckle, J. H. M. Michon Buckle, J. H. M. Michon Buckle, J. W. M. Michon Buckle, J. W. M. Humphrey Burlar alarm system Burlar alarm sy	879,951 879,881 879,969 880,170 880,080 879,891 880,432 880,437 880,475 880,277 880,303 879,974 880,067 880,216 880,154	
for, Ney & Uliman Button cutting and shaping machine, auto- matic, W. S. Watson.	880,160 880,431 880,185	7
Canner Effecter, he better scientific instruments, stand for photographic, W. Butler Can feeding and righting machine, M. D. Blakeslee Can opener, A. G. Eulner Can righting machine, M. D. Blakeslee Can washer, W. L. Pearce Cane, W. S. Smith Canopy, H. C. Swanwick Car couplings, draft gear for, J. A. Sample Car door, ergin, C. Moore.	880,192 880,191 880,131 880,186 880,162 880,176 880,176 880,183 879,911 879,976	for your and of the property o
Butler Can feeding and righting machine, M. D. Blakeslee Can opener, A. G. Eulner Can opener, A. G. Eulner Can vender, W. L. Poarce. Can wisher, W. L. Poarce. Car on W. S. Swanwick Carony, B. K. Apple. Car ouplings, draft gear for, J. A. Sample. Car door, grain, C. Moore. Car fender, street, J. A. McQuade. Car grain door, box, J. S. Bender. Car mover, J. M. Pisk. Car mover, J. M. Pisk. Car mover, C. E. Zagbarth. Car, All W. C. W. Rote. Car stake, T. Ellis. Car underframe. J. M. Ames. Cars de Carlor and disping device, combined, J. B. Singer Case. See Filing case.	880,233 880,476 880,017 880,372 880,164 880,446 879,996 880,270 880,270 880,470 880,062 879,977	W m fe le fr or W P.
N. W. Smith Carrier system, elevated, F. W. Ayer Carton and display device, combined, J. B. Singer Case, See Filing case.	880,169 880,348 880,410	
Singer Cash delivery device, J. Good, Jr. Caster, McVall & Mechan Casting apparatus, pipe, D. B. Dimick Casting cylinders, pattern for, G. C. Bourdersund	880,448 880,234 880,284 879,942	
dereaux dereaux Cattle lander, E. E. Lamb. Cellulose and making same, nitro derivative of, B. Hersteln Chair, A. G. Eyles Check draft, universal, C. M. Lyman. Churn, A. A. Howell. Churn and butter worker, combined, G. J.	880,146 879,871 880,206 880,150 880,305	1
Chairs and butter worker, communed, o. s. Kaplau Churns, combined hand and foot motor for, D. P. Malone. Cigarette tube, J. Gueniffet et al Cigarette tube or monthylece, J. Gueniffet, et al. Clamping device, McGiffin & McCauley	880,081 880,229 880,487	The same of the sa
Cigarerte tube or mouthpiece, J. Guenffet, et al. Clamping device, McGiffin & McCauley Clasp, M. D. Arnow	880,488 880,460 880,116 879,902 880,200	-
Clamping device, McGiffin & McCauley.  Clasp, M. D. Arnow.  Cleunsing compound, F. F. Pruss.  Clock, electrically operated, H. Gillette.  Clocks, electrical appliance for, Swedberg & Durbin  Clothe winding board, E. Carraine.  Clothes line support, extensible, Mackenzle & Norton  Clatch, electromagnetic, H. Ast.  Clutch, friction, E. Lehmann.  Clutch, friction, E. Lehmann.  Clutch, frietfon delving, A. K. LeMoon.  Clutch, frietfon delving, A. K. LeMoon.  Clutch, frietfon delving, A. W. LeMoon.	879,924 880,276 880,031 880,266	
Clutch, friction, J. Fuchs. Clutch, friction, E. Lehmann. Clutch, friction driving, A. R. LeMoon. Clutch, roller, G. M. Wilson.	879,862 880,083 880,084 879,993 880,256	

for superimposed, 880,285

te, apparatus for moldck, C. Deeg....... 880,201



"Star" Food and Power Screw Cutting Cross Lathes FOR FINE, ACCURATE WORK

Send for Catalogue B.
SENECA FALLS MFG. CO.
698 Water Street,
Seneca Falls, N.Y., U.S.A. **Engine and Foot Lathes** 

MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE SEBASTIAN LATHE CO.. 120 Culvert St., Cincinnati, O.

Foot and Power and Turret Lathes, Plans HEPARD LATHE CO., 133 W. 2d St., Cincinnati, O.

Our Hand Book on Patents, Trade-Marks, etc., sent free Patents procured through Munn & Co. receive free notice in the SCIENTIFIC AMERICAN

MUNN & CO., 361 Broadway, N. Y. BRANCH OFFICE: 625 F St., Washington, D.C.



THE (LIPPER (LIP Its triangular shape prevent agling and gives three time apacity of any other Clip fo hing papers together. at & Cheapest. All Stationers.

CLIPPER MFG. CO., 401 West 124th St., New York, U.S.A

#### Veeder Counters

EEDER MFG. CO. 18 Sargeant St. Hartford, Conn.





GUNSMITHS, TOOL MAKERS, EXPERI-MAKERS, EXPERI-MENTAL & REPAIR WORK, ETC.

From 9-in, to 13-in, swing, Arranged for Steam or Foot Power, Velocipede or Stand-up Treadle. Send for Lathe Catalog. W. F. & JNO. BARNES CO. Established 1872. 1999 Ruby St., Rockform, LL.





4-Cycle Engines Skilfully designed and well built. Single lever control, com-bining automatic carburettor with spark advance. Develops wide speed range and reliability under most trying conditions Sizes 3 to 6 b. p. Send for catalog.

CHAS. J. JAGER CO 281 Franklin, cor. Batteryma Boston, Mass. arch St.

THE EUREKA CLIP

factured by Consolidated Safety 'in Co., Box 121, Bloomfield, N. J.



Wizard Repeating LIQUID PISTOL

In Cash 9 \$50,000 \$10.00 In Stock Of The Miami Cycle & Mfg. Co., which earned 10% during the of 1907, is offered as proof that World's

THE MIAMI CYCLE & MFG. CO. Middletown, Ohio, U.S.A.

veyer, cotton and cotton seed, Smith n for table use, preparing, F. A. Col-Corn for table use, preparing, F. A. Collins

Lins and Collins and E. McClintock
Cuff protector, H. A. Frank.
Cuff protector, H. A. Frank.
Cuff protector, H. A. Frank.
S79,955
Cultivating machine, motor driven, K.
Koszegl
Current motor, C. A. Neyland.
S80,233
Curtaln pole, E. Sauerburger.
S80,234
Cutting res.
S80,244
S80,243
Cycles, abock-absorbing device for, F. B.
Graham-Yooll
Cylinder head, H. Buck.
S80,297
Cylinder head, H. Buck.
S80,278
Davenport, C. J. Kindel.
S80,278
Desk table, M. P. Harding.
S80,221
Davenport, Cooperamith & Kindel.
S80,278
Desk table, M. P. Harding.
S80,232
Developing tray, M. P. Foran.
Dinitroglycerin, etc. obtaining, F. I. du
Pont
Distillation of wood, destructive, T. W.
Pritchard: closing, C. Mull.
S80,466
Political S80,252
Door automatic closing, C. Mull.
S80,466
S79,883
Door automatic closing, C. Mull.
S80,550
Door seath, sliding, G. P. Balch.
S80,550
Door reach, sliding, G. P. Balch.
S80,550
Door for safes, etc., to their seats, mechanism for forcing, B. F. Tripp.
Double pawl coupling, M. Hanusch.
S80,128
Drawer guide, G. R. Ross.
Dourd freeding device, A. W. Copland.
S79,893
Drilla, ball bearing water head for diamond,
R. E. Parker
Dound freeding device, A. W. Copland.
S80,248
Drilla, ball bearing water head for diamond,
R. E. Parker
Dre and making same, yellow tetrazo, H.
Geldermann
Geldermann
Geldermann
H. S80,233
Electric generators, repulsiting G. S. S.
S80,338
Electric generators, repulsiting G. S. S.
S80,338 mann
Dre and making same, yellow tetrazo, H.
Geldermann
Edger, gang, J. T. Stoddard
Electric are furnace, S. D. Spence.
Electric fare furnace, S. D. Spence.
Electric fuductor, magneto, M. Fischer.
Electric machine, dynamo, H. Chitty.
Electric machine, coil retainer for dynamo, G. Duna
mo, G. Duna
Treat, retainer for dynamo, H. Chitty.
Electric machines, coil retainer for dynamo, H. Electric machines, pole shoe for dynamo, R. B. Treat
Electric machines, pole shoe for dynamo, R. B. Treat
Electrical system, thermo, W. H. Bristol.
Electrode containing metal within the same, are light, H. Viertel
Electrodes, making, E. W. Jungner
Electromagnetic brake, H. Snodgrass.
Elevators, electric signal for, C. E. Moore, Ellipsograph, H. Looyer
End gate, F. Caba.
Engine cylinder doors, means for locking carding, J. Eckersley
Engine reversing gear, internal combustion,
J. Sulzer
Engines, barner for explosive, J. S. Lang. 879,949 880,429 Ellipsograph, H. Looyer
End gate, F. Caha.
Engine cylinder doors, means for locking
carding, J. Eckersley
Engine reversing gear, internal combustion,
J. Sulzer.
Engines, burner for explosive, J. S. Lang.
Exaporator, P. G. Kaiser.
Exacavating, holating and conveying bucket,
J. Marousch
Explosive engine, C. M. Fox.
Explosive engine, J. D. Hay.
Explosive engine, J. R. Research
Fast and J. Peparations, producing, K.
Marchael engine, J. R. Raymond.
Feed bag, H. W. Morris.
Feed bag, W. Lester.
Feed bag, W. Lester.
Feed bag, W. Lester.
Feed bag, W. W. W. Griffith.
Fertilizer, A. L. Kennedy.
Felling case, H. B. Clarke.
Filter, Jones & Hansen.
Filter, L. Jones & Hansen.
Filter, L. Jones & Hansen.
Filter, J. A. Garder, F. Hobbis.
Filtering apparatus, H. P. Taylor.
Free extinguishing apparatus, H. Taylor.
Free extinguishing apparatus, H. Taylor.
Free extinguish 880,093 880,223 880,080 879,972 879,954

crete structure brace, A. J. Robinson. 880,468 trolling mechanism, safety, T. R. Bell. 879,471 to for table use, preparing, F. A. C. Sep. 550 to fork, green, G. W. Ruggies. 880,250 to fork, green, G. W. Ruggies. 880,250 to sheller, W. F. Elliott. 880,250 to sheller, W. F. Elliott. 880,250 on plant thinning machine, Beusse & 890,007 on gin, N. Pearse. 880,007 on gin, N. Lasting machine, C. F. Fym. 880,400
Latch, door, J. H. Brown. 880,005
Latching and treating same, woven, W. E.
Robinson
Latching machine, R. R. Zahnter. 870,981
Lawn aprinkler, H. T. Packard. 877,982
Leg covering, combination, Cohen & Nathan 880,355
Lens, optical, Germain & Ossart. 880,205
Lifting or holating gear for lifting forage, grain bags, etc. E. M. A. Marilly. 880,230
Linotype and bright of the same state of the sa | Section | Sect 417

12

30 64

146 100

89

56 01

08

7 ± 57

54

74 86

13





# Learn Photo-Engraving or Photography

Engravers Earn from \$20 to \$50 per Week
he Only College in the world where these paying professions
e taught successfully. Endorsed by the International Assoation of Photo-Engravers and the Photographers Association
illinois. Terms easy and living inexpensive. Graduates placed
good peetitions. Write for catalogue, and specify THE
HURBE IN WHICH YOU ARE INTERESTED. Address

College of Photography, or } 998 Wahash Ave., College of Photo-Engraving, Full Effingham, III. L. H. BISSELL, President

Pipe Cutting and Threading Machine price list free on application.

THE CURTIS & CURTIS CO.

4 Carden St., Bridgeport, Conn. Branch Off.



#### Motors

for airships and other purposes where light and powerful engines a re required.

1 to 40 H. P. Air Cooled.

50 & 100 H. P. Water Cooled.


Adopted by War Department. Send for catalogue B. G. H. CURTISS MANUFACTURING CO. Hammondsport, N. Y.

B. F. BARNES Eleven-inch Screw Cutting Lathe



For foot or power as wanted. Has power cross feed and compound rest. A strictly high grade, modern tool. Ask us for printed mater, as upon request.

Rockford Drilling Machine Co. Successor to B. F. Barnes Co. Rockford, III.






Convert your Bicycle into a Motor-Cycle with one of our Motor-Cycle with one of our fits. A full line of Finished Motors; also Rough Casting for Bieyele. Auto. Marine or Statlosary. Send stamp for catalogue. I West Girard Avenue, Philadelphia, Pa.



#### Home-Made 100-Mile Wireless Telegraph Set

d SCIENTIFIC AMERICAN SUPPLEMENT 1605 for a ugh, clear description, by A. Frederick Collins, of nostruction of a 100-mile wireless telegraph outfit grous, adequate diagrams accompany the text. 10 cents by mail. Order from your newsdealer or

MUNN & CO., 361 Broadway, New York

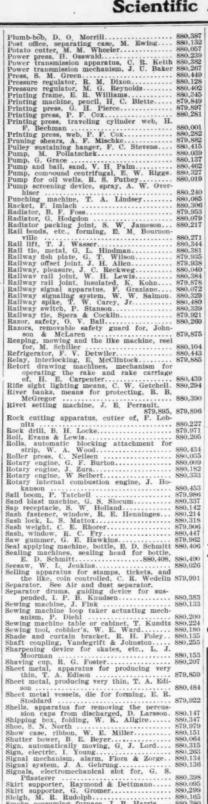

anism, P. Diehl
Sewing machine table or cabinet, T. Kundtz
Sewing tool, cobbler's, W. E. Ward.
Shade and curtain bracket, R. H. Foley.
Shaft coupling, Vandegrift & Johnston.
Sharpening device for skates, etc., L. J.
Showing, R. G. Foster.
Sheet metal, apparatus for producing very thin, T. A. Edison
Sheet metal, producing very thin, T. A. Edison
Stoddard
Sheet metal, producing very thin, T. A. Edison
Stoddard
Sheet metal, producing very thin, T. A. Edison
Sheet metal, producing, W. K. Aligire.
Stoddard
Sheet metal, producing, W. K. Aligire.
Show case, ribbon, W. E. Miller.
Sign, automatically moving, G. J. Lord.
Ssignal mechanism, alarm, Flora & Zorge.
Ssignal mechanism, alarm, Flora & Zorge.
Scills, system, J. A. Gebrung.
Signal system, J. A. Gebrung.
Skirit aupporter, G. Gromer.
Seleigh, M. B. Rudolph.
Show consuming furnace, J. B. Harris.
Soldering copper, R. R. Stein.
Soldering copper, R. R. Stein.
Soldering machines, runway or chute for can end. O. J. Johnson.
Spark arrester, R. B. Kennington
Spark arrester, R. S. Stein
Spring motor, K. J. Lathrop
Steam trap, D. Arthur.
Steam trap, G. Lasser M. Schools, Schools
Steam superheater, Prager & Haylen.
Schools of the steam supracture of the revolving bodies.
Steam su

If my Razor wasn't good enough for me to use I wouldn't ask you to try it!

You certainly cannot doubt the sound logic and wisdom of the many arguments I have advanced in favor of my razor.

You will admit that unless the "Gillette" possessed many points of superiority it never would have been accepted by two million men in the past three years as the best, most simple and satisfactory shaving device in this world.

In the first place my razor requires No Stropping. No Honing. It is always ready. That's why it's the most practical. You can shave in three to five minutes.

The thin, flexible, double-edged blades remove a harsh or soft beard with perfect comfort. No pulling, cutting or irritation of the skin. They are so inexpensive that when dull you throw them away as you would an old pen. No other razor so durable. The triple silver plated holder lasts a lifetime. None so convenient; the compact little case can be with you always—if travelling, either it your pocket or grip.

I know men who have shaved in the dark with the "Gillette." Many use it on the train, others while on hunting trips, fishing expeditions, etc.

That's the beauty of my razor, you can obtain a perfect shave under all conditions—wherever you are.

And I will guarantee you will agree with me right now—that my razor just fits your case. A trial will prove it to you. Action must accompany right thinking or you have no power of execution.

Put this correct line of thought into action. Get a "Gillette' ay, All Jewelry, Drug, Cutlery, Hardware and Sporting cods dealers sell it.

King Chillette

The Gillette
Safety Razor Set
consists of a triple
silver plated holder,
12 double-edged
flexible blades 24
keenedges, packed in a velvet lined
leather case and the price is \$5.00.

Combination Sets from \$6.50 to \$50,00

CILLETTE SALES COMPANY 207 Kimball Building BOSTON

lette Safety NO STROPPING NO HONING RAZOT

#### THE RACING MACHINE SPARK PLUG



The Center Fire Plug Power increased 10 per cent. each explosion. Ignition in center of compression. Soot proof, quick action, perfect combustion.

Agents Wanted. Sample Plugs, \$1.00 each. Give name of car and year. Write

GENERAL ÁCCUMULATOR & BATTERY CO., 128 Second St., Milwaukee, Wis.

### The Bungalow Number of American Homes and Gardens

# Do You Own a Are You Building a Bungalov



If so, read the Special Bungalow

#### American Homes and Gardens

TO BE PUBLISHED IN MAY

The number will contain over 60 pages of helpful, practical information, packed with beautiful photographic reproductions of all kinds of bungalows, big and little, costly and cheap. Everybody's taste has been consulted. Besides articles on tastefully designed small houses accompanied by plans and halftones, there will be contributions on the decoration of the bungalow, its furniture, plumbing and sewage disposal, in a word articles

on everything that pertains to the bungalow, inside and out.

This issue will include: re for the Bungalow, by Esther Singleton ries and Rugs for the Bungalow, by Alice

Sanitation of the Bungalow, by John

Rectoring Sanitation of the Bungalow, by John Cade Oranmental Log Cabins, by Dorothy Sythe Artistic Curtaining, by Phoebe Westcott Humphreya A Summer Camp at Arden, by Mabel Tuke Priestman A Garden Room, by Carine Cadby

What is and What is not a Bungalow, by Tornino Lentellus
How to Build a Log Cabin, by Edward Fesser
A Group of California Bungalows, by Helen Lukens
Gaut
A Connecticut Bungalow, by John Sherman
Two New England Bungalows, by Mary Northend
A Texas Bungalow, by Paul Thurston
Ornamental Cateways to Bungalows
A True Bungalow, by Francis D. Nichols

DOUBLE NUMBER. Price 50c.

MUNN & CO., 361 Broadway, N. Y. City

#### Classified Advertisements

#### BUSINESS OPPORTUNITIES.

SOUTH DAKOTA CHARTERS,—More liberal—far cheaper than other States. Free blanks and information. For full particulars apply to Philip Lawrence, Former Assistant Secretary State. Huron, S. D. DESIGN PATENT FOR THIRD TERM CAMPAIGN BUTTON. Three colors. Great money maker. Now is the time. Sent for terms, etc. C. F. Fearson, 615 Marshall Street, Fortland, Ore.

VENDING MACHINES FOR GUM AND SWEETS. Send for descriptive circular. Foreign rights for sale. For full particulars address S-D Machine Company, 45 Greenwich Street. New York City.

INVENTORS.—Send for free sample copy "World's Progress," devoted to interests of inventors. All latest developments in scientific and industrial world World's Progress, 30 21th St., Washington, D. C.

NEW AND USEFUL UMBRELLA RACK.—May 30th 65. Also, Pencil and Fountain Pen Retainer, Septem-er 17th, 1847. Cheapto manufacture. Simple, made of the piece spring wire; would like to hear from factories terested. For particulars address A. M., 730 K Street, aerumento, Cal.

FOR SALE.—New type greatly improved street car ender. U. S. Patent Sé, Sfr and Canadian patent ap-died for. Impossible to injure person picked up by this ender. Address "Uniuri," Box 775, New York.

#### HELP WANTED.

CLERICAL AND TECHNICAL MEN. No matter that experience or position desired, we can interest ou. Information free for the asking. Write, tappoods, 3% Broadway, New York.

1905 FRENCH MORS AUTOMOBILE. 19-24 Horse power. Semi-enclosed with fixed top. Seats seven. In first-class condition, with complete equipment in lamps, tools, tires etc. (are be seen in New York. Price \$2,500. Replies to Mr. R. W. C. Ellson, Bryn Mawr, Pa.

#### EXPERIMENTAL WORK.

EXPERIMENTAL. MCDEL AND ELECTRICAL WORK. Inventions perfected. Address Wagner Model Works, 9 Mohawk Street, Chicago.

#### MOTION PICTURES.

THE MOVING PICTURE WORLD, weekly, 10 cents or copy; yearly subscription, \$2. The only paper de-sted to the moving picture, illustrated song and lan-ra lecture field. Moving Picture World, Box 450, N.X.

#### BOOKS AND MAGAZINES.

\*TROPICAL AND SUB-TROPICAL AMERICA."
e new Hustrated magazine on South and Central
merica, Mexico and West Indies. First number is out.
roe 81 a year. 3 months subscription, 25c. will show its
tube. Tropical America Pub. Co., 18 Frankfort St., N.Y.

rains: Tropical America Pub. Co., 18 brankfort St., N.Y.
ELECTRICIAN AND MECHANIC.—Practical mother
pragazine for electrical and mechanical students and
porkers.—Publishes illustrated directions for contracting dynamos, motors, gasoline engines, wireless
elegraphy, electrodating, electrical wiring, mehanical drawing, using tools, furniture construction,
eat building, all kinds of mechanical work. One
older yearly: trial ambserption for three mouths,
wenty cents. Last of electrical and mechanical boxton, data
eee, S. A. Sampson Pub. Co., 6 Sencon St., Boston, Mass.

#### HOUSEHOLD NEEDS.

BUTCHER'S BOSTON POLISH is the best finish made r floors and interior woodwork. Not brittle; will not wrapping machine cutting mechanism, A. Wrapping machine cutting mechanism, A. M. Price wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. M. Price wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. M. Price wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. M. Price wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. M. Price wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. M. Price wrapping machine cutting mechanism, A. S80,465 wrapping machine cutting mechanism, A. M. Price wrapping wrapping machine cutting mechanism, A. M. Wrapping machine cutting wrapping mechanism, A. M. Wrapping machine cutting wrapping wrappi

#### ASTRONOMY.

STARS AND PLANETS.—Learn to know them at a glance: Astronomy in simplest and most fascinating form. The Lumin-us Revolving Flanisphere shows clearly principal stars visible any hour in year. Simple, handy reliable. Only Sie. T. Whittaker, Ed Bible House, N. Y.

#### EDUCATIONAL.

LEARN TO MAKE PORTLAND CEMENT.—Blocks, white or any color: Waterproofing, Sidewalks, Bridge. Roof, Floor, Re-Inforcements, Valuable Book, \$1.00, Cement Institute, \$60 Chestnut, \$51. Louis, \$60.

#### PHOTOGRAPHY.

AMERICAN PHOTOGRAPHY succeeds America mateur Photographer, Camera and Dark Room an hore fleacen. The editors of each now John in makingsazine which should be in the hands of every phographer, professional or amateur. Is cents monthly 30 per year. Three specimen copies for a quarte m. Photographic Pub. Co., 351 Broadway, New York.

ETO THOSE HARD OF HEARING.—An efficient als sent for trial, no expense, no cisk, no contract, no money unless device he kept. For full particular address A. O. Tiemann & Company, 107 Park Row New York.

#### WATER FILTER.

THE DUPLEX FILTER is positively hygienic an serf-cleaning. Leased by 257 physicium, 6 hospitalshops, factories, private families. Write for agent proposition. Puplex Filter Co., 1,149 Broadway, N. Y.

#### GRE-SOLVENT.

GRE-SOLVENT instantly dissoives Machine-greass Paint, Ink, etc., from bands. Beneficial to skin. Sell like wildfire to every mechanic. Azents wanted. Bi-profits. Free sample. Do it now. Utility Co., 646 W 44th St., N. Y. City.

#### OLD COINS AND STAMPS.

\$5.75 PAID FOR Bare Date 1853 Quarters. Keep al money coined before 1875 and send ide, at once for a see of two coin and stamp vatue books, size 4xT. It may menn your fortune. C. W. Clarke & Co., Le Roy, N. Y

THE INTERNAL WORK OF THE Wind. Br S. P. LANGLEY. A painstaking discussion by the localing authority on acrodynamics, of a subject of value to all interested in airabips. Scientific American Supplements 946 and 947. Price it cents each by mail. Munn & Company, 361 Broadway. New York City, and all nowadealors.

	Tile roofing, B. R. Christensen.  Tire attachment, E. Collins.  Tire cover, W. A. Allen, reissue.  Tire cover, pneumatic, C. A. Brophy.  Tires, making leather, R. J. Elledge.  Tobacco reservoir and cigarette filler, combined, H. D. Bonnell.  Tools, overhead suspending mechanism for motor driven, C. T. & E. E. Wilt.  Toy, chromatic, A. L. Newell.  Toy vehicle, T. E. Crecelius.  Track sweeper, J. E. Kelley.  Tran for basins, sinks, etc., R. C. McCaffrey  Trap for basins, sinks, etc., R. C. McCaffrey  Triping, and skilving machines, feed guide for the force.  Tripod, G. A. Beilfuss  Trolley, G. H. Gross.  Trolley, electric, L. Smith.  Trolley pole support, J. L. Chase.  Trolley pole support, J. L. Chase.  Truck, barrel, Schriver & Webster.  Truck, barrel, Schriver & Webster.  Truck, barrel, Schriver & Webster.  Truck, to T. & E. E. Wilt.  Turbine, C. Wedekind	880,012
1	Tire attachment, E. Collins	880,195 12,754 880,274
,	Tire cover, W. A. Allen, reissue	880.274
8	Tires, making leather, R. J. Elledge	880,371
2	Tobacco reservoir and cigarette filler, com- bined, H. D. Bonnell	879,851
D.	Tools, overhead suspending mechanism for motor driven, C. T. & E. E. Wilt	880,059
	Toy, chromatic, A. L. Newell	880,322 879,947
	Track sweeper, J. E. Kelley	880,308
	Transmitter, S. W. Rothermel Trap for basins, sinks, etc., R. C. McCaf-	880,044
r	Trimming and skiving machines food guide	880,156
100	for, C. S. Pierce	880,038 880.063
4	Tripod, G. A. Beilfuss	880.063 880,021
ř	Trolley, G. H. Gross.	880,107
F	Trolley pole support, J. L. Chase	879,943
5	Trolley wheel spring, R. E. Noble	880,395 880,015
	Truck, barrel, Schriver & Webster	879,914
	Truck, thawing furnace, T. D. Bausher	879,939 880,058
	Turbine, C. Wedekind	880,181
	Turbine, elastic fluid, C. W. Dake	880,365
20.00	Turbine engine, H. A. Buck	880,479 880,366
,	Turbine, internal combustion, P. Krause	880,458 880,127
	Turning plug, H. H. Cramer	880,127
	ment for, E. Terrell	880,341
	Typewriter carriage control, C. M. Sorensen	880,174
1	Typewriter tabulator, W. R. Fox	880,174 879,903 880,290
200	Typewriters, power-driving mechanism for	879,854
Ç S	Typewriting machine, J. Felbel	880.375
,	Typewriting machine, C. C. McPhee	880,391
	Hills	880,077
0	Umbrella, folding, W. Thedorf	880,427
į	W. A. Swaren	880,419 $880,220$
	Undergarment, combination, M. B. Kegg	880,220 880,004
	Valve for instantaneous water heaters, wa-	000,00%
	Valve cate A G Paul	879,910 880,463
	Valve locking mechanism, L. A. Werner	880,056
b	Valve mechanism for internal combustion	880,051
5	Valve, relief, C. W. Miller	880,088 12,755 880,243
	Valve, throttle, J. S. Chambers, reissue Vat support, G. S. Rominger	12,755 880.243
	Vault lining, J. L. Grass	880,020
	Vehicle, motor, J. Ritchie	880,129 880,403
9	Vehicle running gear, J. M. Dick	880,199
	Trolley pole support, J. L. Chase. Trolley wheel spring, R. E. Noble. Truck, J. F. De Long. Truck, J. F. De Long. Truck, thaving furnace, T. D. Bausher. Truck thaving furnace, T. D. Bausher. Truck, C. T. & E. E. Wilt. Turbine, C. Wedekind Turbine, C. Wedekind Turbine, C. Medekind Typewriting machines, assembling attachment for, Typewriting machine, J. February Typewriting machine, J. J. Weiner, J. Willey Typewriting machine, J. J. Medeking Medecking mechanism, L. A. Weiner, J. Willey Valve, throttle, J. S. Chambers, reissue, Valve, London, J. Ritchle Vehicle running gear, J. M. Dick, Vehicle	880,076
•	Hicks Vehicle running gear or suspension frame, R. Herman	880,025
	Vehicle shock absorbing device, L. C. Welch	880,257
	R. Herman Vehicle shock absorbing device, L. C. Welch Vehicles, conducting conduit for, F. M. Brinckerhoff	880,477
,	Vehicles, conducting conduit for, F. M. Brinckerhoff Vehicles, means for preventing side silp of motor, T. B. Heathorn. Wagon, dumping, J. H. Van Arsdale. Wagon wheel, R. E. Jeffery Warp threads in warp twisting machines, device for separating the ends of, G. Hiller	880,212
l	Wagon, dumping, J. H. Van Arsdale	880,054
	Wagon wheel, R. E. Jeffery	880,307
	device for separating the ends of, G.	000 015
	Washing machine, J. W. Ayers	880,215 880,349
Ŋ	Washing machine boiler J. W. Seifert	880,349 880,334
	Water heater, F. P. Obenauer	880,250 880,237
	Water, heating and purifying, J. C. Jones	880.456
	Wave motor, G. M. Wilson	879,856 879,992
	Wave motor, A. Allen	880,474
	P. F. Cox	880,279
	Web feeding mechanism, continuous vari-	880.280
	Well packer, deep, C. M. Heeter	880,280 880,213
	device for separating the ends of, G. Hiller Washing machine, J. W. Ayers. Washing machine boiler J. W. Seifert. Washing machine local W. Seifert. Washing machine gearing, H. I. Staley. Water heater, F. P. Obenauer Water heating and purifying, J. C. Jones. Water purifying anparatus, C. R. Darnall. Wave motor, G. M. Wilson Wave motor, G. M. Wilson Wave motor, A. Allen Web T. F. Cox Web, T. Cox Wheel, See Paddle wheel. Wheel, G. M. Bueey Wheel rim for pneumatic tires, C. S. Scott Wheel rim for pneumatic tires, C. S. Scott Wheel rim for pneumatic tires, C. S. Scott	879,964
	Wheel, See Paddle wheel, Wheel, G. M. Bucey	880,122
	Wheel rim for pneumatic tires, C, S, Scott	880,332
		880,261 879,861
	Whiffletree, J. E. Moan	880.231
	Wind motor, D. D. McIntyre,	880,461 880,321
	Window lock, A. Anderson	880,265
	Wire bending device, A. H. Neller Wire drawing machine, H. L. Thompson	880,235 880,178
	Wire drawing machine, H. L. Thompson Wire reel, automatic, C. E. Wallgreen Wire splice or coupling, I. M. Botkin	880.114
	Whiffletree, J. E. Monn wind guard, Medfillin & McCauley Wind motor, D. D. MeIntyre Window lock, A. Anderson Wire bending device, A. H. Neller Wire bending device, A. H. Neller Wire drawing machine, H. L. Thompson Wire reel, automatic C. E. Wallgreen, Wire suspending device, H. E. Stevens, Wire suspending device, H. E. Stevens, Wire suspending machine cutting machanism, A	879,941 880,416
	Wrapping machine cutting mechanism, A. M. Price Wrench, W. B. Orr.	880,465 879,980
	ti sanah II Sanka	290 220

Emblem, F. A. Miller	
Fabric, pile, S. Blumenthal	
Hammock, I. E. Palmer	
Hand bag, H. Grossman	39,157
Muscle testing machines, casing for, A. A.	
Brodeur	39,159
Pillow cover, L. G. & J. H. Langrock	
Stove, G. M. Coke	
Vending machine case, Hagen & Townsend	
Vessel, J. J. Heedy	39,156

	TRADE MARKS.		ľ
	Beer, ale, porter, and stout, Beadleston &		
	Woerz	67,946	
	Woerz Beer, carbonated, C. Neunsinger Binders, loose leaf, C. E. Sheppard. Boots and shoes, leather, W. B. Cosgrave	67.914	,
n	Boots and shoes, leather, W. B. Cosgrave		
162	Shoe Co	67.889	
0-	Brooms, Lee Broom & Duster Co	67,870	
y,	Canned fish. Warfield-Pratt-Howell Co	67,945	
r.	Chemicals, certain, Farbenfabriken of Elber-	07 007	ŀ
	feld Co,	67,867	l.
	Chemicals, certain, Stevenson & Howell Chiffons, L. Erstein & Bro	67,879 67,947	В
	Climbols, L. Erstelli & Bro	67,952	
	Cigarettes and cigars, D. W. Simmons Clothing, certain, Barth & Myer	67,926	
	Clothing, certain, W. A. Kraemer	67,936	
ld	Coats, vests, trousers and overcoats, J. Co-		
10	hen, Son & Co		1
rs W,	Cocktails, Cook & Bernheimer Co		u
w.s	Cocoa and chocolate, Cadbury Bros	67,928	
	Coffee Substitute and chicory, E. Seelig	67,925	
	Conee substitute and cincory, E. Seeng	67 021	
	Compresses certain Philadelphia Drying	31,001	ı
d	Machinery Co.	67.853	ľ
8.	Cordial, L. Pelosi	67,957	
8.	A. G. Compresses, certain, Philadelphia Drying Machinery Co. Cordial, L. Pelosi. Corsets, Indies', J. Wanamaker.	67,944	
		67,729	
	Cream and freckle eradicator, toilet. De	07 000	
	Miracle Chemical Co	67,906	
	Cream and pomades, cold, Vereinigte Chem- ische Werke Aktiengesellschaft	67,899	
1	Cream, cold, C. E. Keeler	67,011	
e.	Cream, massage, Acme Chemical Co	637, 59000	
ls l	Cutlery, etc., S. Osborn & Co	67.874	
E.	Cutlery, etc., S. Osborn & Co Drill grinding machines, Wilmarth & Mor-		
-	man Co.	67,858	
- 1	Electrical apparatus, certain, R. Bosch	67,863	
- 1	Fence, wire, T. Litwiller	67,871	
	guisher Co	67.865	
- 1	Flat, table, and hollow ware, Wilkinson	04,000	_
n.	Sword Co.	67,953	4
8	Flavoring essences and extracts, Stevenson &		ı
y	Howell	67,942	ı
7	Flour, wheat, Rippe Grain & Milling Co	67,940	ı
_ 1	Food for infants and invalids, Fairchild Bros.	07 000	ı
E	& Foster Foods cortain Hulman & Co	67,932 67,922	ı
2	Foods, certain, Hulman & Co	67,934	ı
E E	Furniture, certain, J. L. Tandy	67,881	1
31	Garters, Harris Suspender Co	67,935	ľ
C	Gin. Cook & Bernbeimer Co	67,956	ı
0	Hair cosmetics, H. Schwarzkopf	67,897	1
10	Hames and trimmings therefor, U. S. Hame	67,960	1
-	Co	01,000	*

# CRYSTAL IN 515 Sealed Boxes Only! · Best Sugar for Tea and Coffee! · By Grocers Everywhere!

#### THE LATEST AND BEST

# W. FABER



# "CASTELL



# Drawing Pencils

Made of the purest graphite in 16 degrees of hardness, 6B to 8H, of the utmost delicacy of tone, permanency, durability and intensity of color.

They take the finest point obtainable of any lead pencil, are least liable to wear, therefore more lasting than any others. Sold by all stationers and dealers in artists' materials. Sample sent to all parties interested on receipt of 10 cents in postage stamps.

# W. FABER

49 Dickerson Street, Newark, N. J.

#### The Largest Air-Cooled Motor Made

5 HORSE POWER

Write for Agency.

Air-Cooled Motor Co. Lansing, Mich.



# **\$40 MOTORCYCLE**



Motors and Castings for Air Ships Harry R. Geer Co., 851 McLaran Ave., St. Louis, Mo.



# DEAN ENGINES GAS GASOUNE ALCOHOL OUR Catalog is unique. It gives the bore and stroke of our enclines—tells just what is included in each equipment; explains why we composition. Sent free on request. Address the

BEAN GAS ENGINE & FOUNDRY CO. 110 Front St. Newp

#### Instructive Scientific Papers ON TIMELY TOPICS

Price 10 Cents each by mail

ARTIFICIAL STONE. By I., P. Ford, A paper of immense practical value to the architect and builder. SCIENTIFIC AMERIpaper of immense practical value to the architect and builder. Scientific American Supplement 1500.

THE SHRINKAGE AND WARPING OF TIMBER. By Harold Busbridge, An

excellent presentation of modern views: fully illustrated. SCIENTIFIC AMERICAN SUPPLEMENT 1500.

CONSTRUCTION OF AN INDICATING OR RECORDING TIN PLATE ANEROID BAROMETER. By N. Monroe Hopkins. Fully illustrated.

DIRECT-VISION SPECTROSCOPES.

MENT NO. 1493.
HOME MADE DYNAMOS. SCIENTIFIC
AMERICAN SUPPLEMENTS 161 and 600 con-

PLATING DYNAMOS. SCIENTIFIC AMERICAN SUPPLEMENTS 720 and 793 describe their construction so clearly that any

DYNAMO AND MOTOR COMBINED. AMERICAN SUPPLEMENTS 844 and 865.
The machines can be run either as dynamos

ELECTRICAL MOTORS. Their Construction at Home. Scientific American Supplements 759, 761, 767, 641.

Price 10 Cents each, by mail

Order through your newsdealer or from

MUNN @ COMPANY
361 Broadway New New York "Get There BLACK MOTOR BUGGY BLACK for country roads, hills Engine—10 H. P., 2 cy drive rear wheels, double lutely safe and reliable. Write for Book No. BLACK MFG. CO., 124 E. Ohio St., Chi



Build Your Own Boat BROOKS SYSTEM

AND SAVE THREE-FOURTHS

I can sell you a boat for one-fourth of what a factory would charge, 100 cents worth of actual value and re-

am and covering the contained them as a contained with a

Read my guarantee—it means you take no risk.
Seven years ago I originated the pattern system of boatuilding. 50,000 boats (more than the combined output of all ctories) have been built from my system, mostly by ienced men and boys.

Boat Patterns, \$1.50 and Up

by one can build at by using my size printed er patterns and aper patterns and
A Set-up Frame
ustrated instruction sheets. You cannot fail to build a
od a boat as the professional boat builder.

Knock-Down Boat Frames

Many people prefer to buy my inock-down frames (all ready to put together) in in many cases supply knock-down frames at a lower fice than you would pay for suitable raw material.

All parts of my cock-down frames are curately shaped and achimed, reedy to put gether.

ms and illustrated instructions needed to finish that free with K. D. frames.

Rew Boat

(4) seven-eighth the freight. You can figure this out yourself. If eagine is desired, I make a special combination price with knock-down frame.

Remember, my guarantee means just what it says. The boat you build will be satisfactory—I guarantee it. I take dithe risk. Write me personally for my Boat or Engine Catalog, mailed free.

BROOKS BOAT MFG. CO.

C. C. BROOKS, Pres.

402 Ship Street, SAGINAW, MICH., U.S. A

The Motorcycle That Makes Good MERKEL MOTOR CO. 1128 26th Ave., Milwankee, Wis.

Firemen and Brakemen
Earn from \$100 to \$183
this school in great demand. Actual railway
officials teach you by
mail during your spare time,
at small cost. Free catalog, etc.
The Wenthe Railway Corres, School,
Box 586,



TRADE MARKS

Scientific American.

A handsomely filustrated weekly. Largest cir-culation of any scientific journal. Terms, 48 at year; four months, 41. Sold by all newsdoalers. MUNN & CO, 361Broadway, New York Branch Office, 65 F St., Washington, D. C.

Harness, certain, Covert Manufacturing Co. 67,887
Hinges and hinge blanks, Columbian Hardeware Co. Coley Mrg. Co. 67,822
Hoese, Withington & Cooley Mrg. Co. 67,822
Hoese, Withington & Cooley Mrg. Co. 67,822
Hoese apports bands, N-M-C-R Co. 67,872
Hoese apports bands, N-M-C-R Co. 67,872
Inks and ink pads, Fountain link Pad Co. 67,833
Insecticles, Strawsons 67,889
Iron compound, certain, C. Cederroth. 67,891
Lamp mantles, gas, General Gas Light Co. 67,893
Lamps, vehicle, Roberts & Matthews. 67,890
Lamp trimmers and edgers, H. O. Secrest. 67,875
Lime and ready-mixed mortar, Rockland-Rockport Lime Co. 67,876
Liniments, Theoline Chemical Co. 67,803
Hardical Comporation 67,869
Machinery Co. 67,869
Match ignition strips, safety, C. M. Hunter 67,852
Match ignition strips, safety, C. M. Hunter 67,873
Medichal preparation certain, Mariani & Co. 67,910
Mediches and plasters, Societe anonyme des
Produits Chimiques Speciaux 67,916, 67,918
Medichal Bandhetures, Societe anonyme des Produits Chimiques Speciaux 67,916, 67,919
Medichal manufactures, certain, Gillette-Vibler Co. 67,917, 67,918
Metal manufactures, certain, Gillette-Vibler 67,917, 67,936, 67,917, 67,938 Metal manufactures, certain, 67,868 Co. Milk, Lacto-Bacilline Company of New York, 67,937, 67,938 67,915 Milk, Lacto-Bacilline Company of New York,
Ointment, Robinson Bros. & Co. 67,937, 67,938
Packing, steam or machinery, Kuschnitsky
& Grunhut

A. Kirk 67,884
Paint, A. E. Kirk 67,888
Paint Catterials, certain, Clevelan Yaranish Catterials, certain, Clevelan Yaranish Catterials, certain, Marchael Catterials, 

#### LABELS.

"8. 8. Borden Co.'s Creamery Butter XXXX
Brand," for creamery butter, 8. 8.
Borden Co.
"Schilling's Best, for pepper, A, Schilling 14,060
"Schilling's Best," for cream tartar, A. 14,061
"Schilling's Best," for cream tartar, A. 14,061
"Schilling's Best," for soda, A. Schilling & Co.
"Star Feed," for stock and poultry feed,
Balston Purina Co.
"Superior Portland Cement," for cement,
Superior Portland Cement, Tor cement,
Superior Portland Cement Co.
"The Boller," for wash bollers, M. Kamenstein 14,069

#### PRINTS.

"Our Cutter," for men's and boys' coats,
vests, and trousers, Ed. V. Price & Co.
"Our "Scaoolmaster" Series No. 5," for men's
and boys' coats, vests, and trousers, Ed.
"Our Schoolmaster' series No. 6," for men's
and boys' coats, vests, and trousers, Ed.
V. Price & Co.
"Our Schoolmaster' Series No. 7," for men's
and boys' coats, vests, and trousers, Ed.
V. Price & Co.
"Our "Schoolmaster' Series No. 7," for men's
and boys' coats, vests, and trousers, Ed.
V. Price & Co.
"Our "Schoolmaster' Series No. 8," for men's
and boys' coats, vests, and trousers, Ed.
V. Price & Co.

"Our "Schoolmaster' Series No. 8," for men's
and boys' coats, vests, and trousers, Ed.
V. Price & Co.

2,229

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be added.

#### How to Build a 5 H.P. Gas Engine at Home

In Scientific American Supplements
1641 and 1642, E. F. Lake describes simply
and thoroughly how a five horse power
gas engine can be built at home. Complete working drawings are published,
with exact dimensions of each part. Price
by mail for the two Supplements, 20 cents.
Order from working the property of the pr

Order from your MUNN & COMPANY Publishers 361 Broadway, New York

UBBERSET

Imbedded in Solid Rubber

The most vital part of a shaving brush is the setting of the bristles. The better the setting the better the brush that's why

# RUBBERSET

# Shaving **Brushes**



last a lifetime without the loss of a single bristle, for the bristles are imbedded in a base of solid rubber that is impervious to hot water, soap or hard usage. The shape of a Rubberset brush is always perfect—the bristles are always alive—the handles never crack—the brush improves with age until you wouldn't part with it for ten times its price -yet it costs no more than ordinary kinds.

The name on every brush guarantees it.

At all dealers' and barbers', in all styles and sizes, 25, 50, 75 cents to \$6.00. If not at a dealer's, send for booklet from which you may order BY MAIL.

To the average man we commend the \$1.00 brush.

THE RUBBERSET BRUSH COMPANY, 74 Ferry Street. Newark, N. J.

LET US BE YOUR FACTORY
STAMPINGS, MODELS, EXPERT WORK
THE GLOBE MACHINE AND STAMPING CO.
970 Hamilton's C. Clevelund, 0.

MACHINES Corliss Engines, Brewers' and Buttlers' Machinery. THE VILTER MFG. Co., 399 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK Inventions developed, Special Machinery E. V. BAILLARD, 24 Frankfort Street, New York.

RUBBER Expert Manufacturer PARKER, STEARNS & CO., 228-229 South Street, New York

Experimental & Model Work

MODELS CHICAGO MODEL WORKS

ELECTRIC GOODS,—Big Cat. 3 cts. Agents. Ohio Electric Works, Cleveland, O.

DIE SPECIAL MODELS
TOOLS
Experimental Work for Inventor
H. TURNER TOOL CO., 215 S. Clinton St., Chicago

Magical Apparatus.

MANUFACTURERS.
METAL SPECIAL TIESFIGURE

METAL SPECIAL TIESFIGURE

METAL SPECIAL TIESFIGURE

METAL SPECIAL TIES-DRYING MACHINES for all kinds of gran undersials. S. E. worrell, Haunibal, Mo.

MASON'S NEW PAT. WHIP HOISTS

Manfd. by VOLNEY W. MASON & CO., Inc Providence, R. I., U. S. A.

KUHLMAN TRANSFORMERS Quality always. Single and 3-phase. Prompt delivery. KUHLMAN ELECTRIC CO. ELEMANT, IND.

# METAL STAMPINGS TOOLS, DIES Well Equipped Factory for General

EXPERIMENTAL

Our expert mechanics are
"UP TO THE MINUTE"

NOVELTIES & PATENTED ARTICLES
MANUFACTURED BY CONTRACT, PUNCHING DIES, SPECIAL MACHINERY,
E.KONIGSLOW STAMPING & TOOL WORKS, CLEWE LAND, O.

INVENTORS We manufacture METAL SPECIALTIES of all kinds,

lowest prices. Send perfect sample for FREE to low estimate and best expert advice THE EAGLE TOOL CO., Dept. A, Cincinnati.

Any one can Play any Guitar Write ALBERT PIETSCH 605 Cedar St., Milwaukee, Wis.



Army Auction Sale Bargains Large 200 page (stamps). Francis Bannerman, 501 Broad




THE LARGEST ENGINES IN THE WORLD



Keep CHICAGO & ALTON Trains On Time Between
CHICAGO · ST. LOUIS · KANSAS CITY.

"The Only Way"
GEO.J. CHARLTON, GENERAL PASSENGER AGENT. CHICAGO.





We request manufacturers, inventors and others needing special articles in rubber to send us descriptions of their require-ments with drawtheir ings or wood models for estimates as to cost of producing in rubber.

A full line of

Mechanical Rub-ber Goods of every description.

# Vulcanizing Press for Rubber Specialties

A Single Plate Mold. B Double Plate Mold. C Steam Spaces in Press Plates. D Hydraulic Pressure 2000 ibs. square inch.

NEW YORK BELTING & PACKING COMPANY, Ltd. 91 & 93 Chambers Street, New York

The state of the s

LEARN TO BE A WATCHMAKER

Bradley Polytechnic Institute

#### Make Your Own CONCRETE BLOCKS



THE PETTYJOHN CO., 615 N. Sixth St., Terre Haute, Ind.

"HOW TO REMEMBER"

#### EFFICIENT POWERS

AT ARE ADAPTED TO THE USES
ALL CLASSES OF MECHANICS



Horizonian creases

Loren power.

Loren power.

Loren power.

Stecks carried by L. H. C. local agents. Call on them or write in Home Office for catalogs and partitionar.

ETERNATIONAL MARYENTER COMPANY OF AMERICA (Incorporated).

Li Harvester Building, chicago, Ill.



chemically removes carbon from cylinders, piston valves and rings INCREASES POWER 20 PER CENT Velatilizes carbon, in which form it passes out exhast. Injury to metal impos-sible. Agents wanted in certain local-ties. Sample, quart can, \$1.50. Write to-day for particulars.

General Accumulator & Battery Co 128 Second Street, Milwaukee, Wis.



#### THE STRONGEST



LIGHT **METAL** 

## MCADAMITE

ion, - 44,000 lbs. to sq. in. Compression, 126,000 lbs. to sq. in. sverse, 87,000 " " " Torsion, - 60,000 " " " " " Send for test bar or a pattern for sample casting

U. S. McADAMITE METAL CO.
19 Rapelye Street BROOKLYN, N. Y

# Every Quality Counts



in making an automobile eminently luxurious and comfortable, thoroughly dependable under all conditions of service, with that detailed mechanical refinement which characterizes advanced motor car construction—these are the qualities conspicuously present in

Model G

画 \$2000

Because of its smooth action, even balance and unfailing constancy of power, Model G has many times proven its supremacy in severe competition with cars of higher price and rated power and greater number of cylinders.

A demonstration will be cheerfully given by your nearest dealer. Described in Catalog G 47.

If interested in smaller cars, get our booklet No. 47 entitled

"The Truth About the Automobile and What it Costs to Maintain One."

Giving valuable information on the low cost of maintaining the single-cyl-inder Cadillacs—Model T (4 passengers), \$1000, and Model S Runabout, \$850. Both described in Cata-

\$850. Both described in Caualog T 47.

Another exclusive four-cylinder car is Model H, \$2500, described in Catalog H 47.

Prices include pair of dash oil lamps, tail lamp, and horn.

CADILLAC MOTOR CAR CO. Detroit, Mich.

214 Broadway, New York

The leading weekly Engineering paper of the world, devoted to the interests of Civil, Mechanical, Mining, and Electrical Engineers. 100 to 125 pages weekly. Send for free sample copy.

A Wonderful Automatic Pump sanatoriums, state institutions, irrigation pur-

Niagara Hydraulic Ram has no equal. Requires no attention; no cost for repairs. Write for Mocklet AA and guar-abteed citimate.

NIAGARA HYDRAULIC ENGINE CO. Naconn St., N. Y. Factory: Cheeter, Pa.



catalogue and prices. Chicago Solar Light Co. Deps G. Chicago

STEEL TAPES e. Nickel plated rounded edges with center stop ninches and 16ths

# CRUDE ASBESTOS

ASBESTOS FIBRE OFFICE, ST. PAUL BUILDIN 220 B'way, New York.

News

# Mullins Steel Boats Can't Sink

—the fastest and safest boats built. Made of pressed steel plates, with air chambers in each end like a life boat, they are absolutely safe. Faster, lighter and more buoyant than wooden boats—practically indestructible—they don't leak, crack, dry out or wear out, and every boat is absolutely guaranteed. The ideal boats for pleasure, summer resorts, boat liveries, etc.

Jend for catalog of Motor Boats—Marine Engines
—Row Boats—Hunting and Fishing Boats.

THE W. H. MULLINS COMPANY, 118 Franklin St., Salem, Ohio.

HENRY C. SQUIRES SONS are General Agents in Greater New York and Long land for Mullius Boats and Launches. Squires Building, 44 Cortlandt St., N. Y.


# **Working In The Dark**

Don't work in the dark. Don't let oppor tunities for advancement slip by you just because you can a see them. Turn the searchlight of knowledge upon your every-day work; learn all there is to know about your trade, and get an insight into trades related to it.

The American School of Correspondence has brought he light of special knowledge into the homes of thousands of wage-earners and shown them the way to a better pourtou with a better future. Whatever your present education and circumstances are, it can help you by home study, without interrupting your work, to get easier work, shorter bours, and better pay.

Mathem Hesti

AMERICAN SCHOOL OF CORRESPONDENCE CHICAGO





GHEST AWASSA JAMESTOWN EXPOSITION Add TONE to pour Stationery in the OFFICE BANK, SCHOOL or HOME by using only Wasburne's Pal.

10 K. PASTENERS
There is genuine pleasure in their use as well as Perfect Security. Easily put on or taken off with the used repostedly and the used reposted the used the used reposted the used the used reposted the used reposted the used the u

thumb and finger. Can be used repeatedly and "they always nork." Made of brass, 3 sizes, in brass of 100 fasteners each sample box of \$9, ascertad. Booklet free. THE O.K. MFG. CO. Dept. & Syracsse, N.Y. Milkelmann, and the state of the system of the syst





UNDERWOOD MECHANICAL BOOKKEEPING UNDERWOOD MECHANICAL CORRESPONDENCE

UNDERWOOD. THESE BILLING

THREE INVOICING FORMS BOOK-KEEPING

CORRESPONDENCE **TYPEWRITERS** MAKE IT POSSIBLE TO

ROUGHLY SYSTEMATIZE AL

BUSINESS NO 3. CONDENSED BILLER.

THE UNDERWOOD TYPEWRITER CO.INC. NEW YORK OR ANYWHERE.

